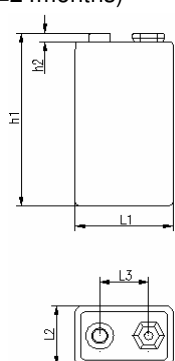

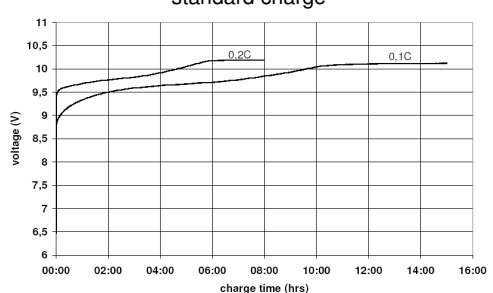
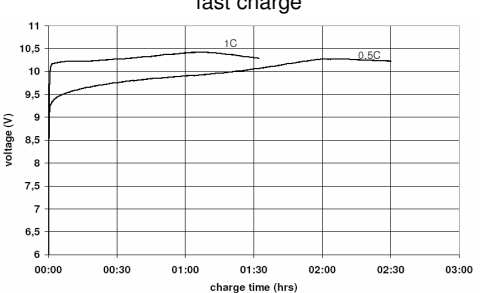
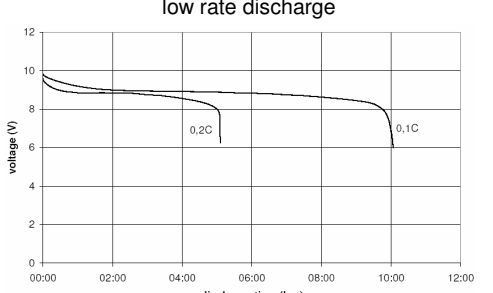
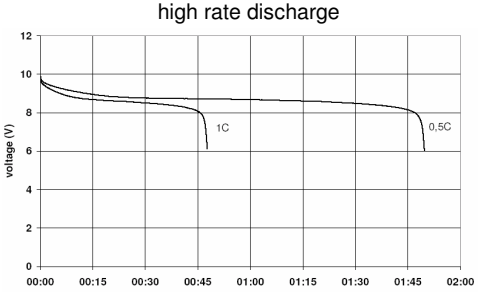



		Conditions	Diagrams
cell type:		NiMH	
cell size:		E-block	
nominal voltage:	8.4	V	
max. charge voltage:	10.15	V	at standard charge (0.1C / 20°C)
capacity			
nominal:	200	mAh	discharge at 0.2C
minimum:	200	mAh	discharge at 0.2C
	180	mAh	discharge at 1C
			7.0V end discharge voltage
			ta: 20°C
max. continuous discharge current:	600	mA	ta: 0...45°C
charge			
standard charge:	20	mA	14....16hrs
quick charge:	60	mA	4hrs
fast charge:	200	mA	1.2hrs
recommended charge termination control parameters:	15....35	mV	- delta V
	120	%	of nominal input
			by timer cut off
trickle charge current:	2...10	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 20	mA	no conspicuous deformation no leakage
internal resistance: (impedance)	≤ 0.8	Ω	at 1KHz battery fully charged
life expectancy:	≥ 500	cycles	acc. IEC standard
self discharge			
charge retention: (at ≤ 20°C ambient)	≥ 85	%	after 6 months storage
	≥ 80	%	after 12 months storage
initial capacity:	≥ 140	mAh	within 30 days after delivery discharge at 0.2C
ambient temperature range:	0...45	°C	standard charge
	10...40	°C	fast charge
	- 20...65	°C	discharge (≤1.0C)
	0...45	°C	discharge (>1.0C)
	- 20...50	°C	storage (≤3months)
	- 20...40	°C	storage (≤6months)
	- 20...30	°C	storage (≤24months)
QCT1:	20/180/750		
QCT2:	30/170/800		
mechanical specifications			
cell dimensions (incl. label)			
Length L1:	26.5	- 2.0	mm
Length L2:	17.5	- 2.0	mm
Length L3:	12.7	± 0.25	mm
height h1:	48.5	- 1.0	mm
weight:	41	± 4	g
blister card dimensions:	123	x 86	mm
blister card weight (incl. battery):	50		g
			
			
			
			
			
			

	ANSMANN Specifications for model:	9V-E-block - 200mAh low self discharge 1pcs blister package
	data sheet no. / part no.	5035342
	version no.	0
	author / date	Gramlich / 29.01.2009

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice