




System:

Zinc/Silver Oxide  
High Drain Type

Scale 2:1

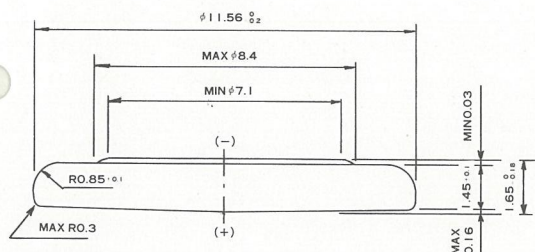

(Unit: mm)

Nominal Voltage: 1.55V

Average Service Capacity: 28mAh  
(Rated capacity at 33,000Ω load  
cut-off voltage 1.2V at 20°C)

Average Weight: 0.7g

Average Volume: 0.14cm<sup>3</sup>


Storage loss at 20°C(68°F): Less than 7% in 1 year

Storage loss at 60°C(140°F): Less than 7% in 20 days

Casing Negative: Nickel Clad

Positive: Nickel Plated Steel

Discharge Curve Load: 33,000Ω

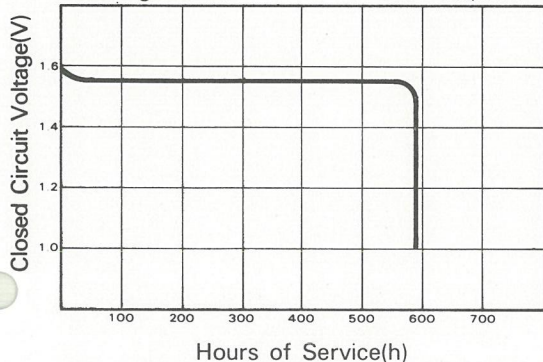


## ● Service Life (at 20°C)

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	47	33,000	590 hours
24h/day	13	120,000	2,150 hours
24h/day	2.8	560,000	14 months

\*Cut-off voltage 1.2V

Closed Circuit Voltage (at 20°C)

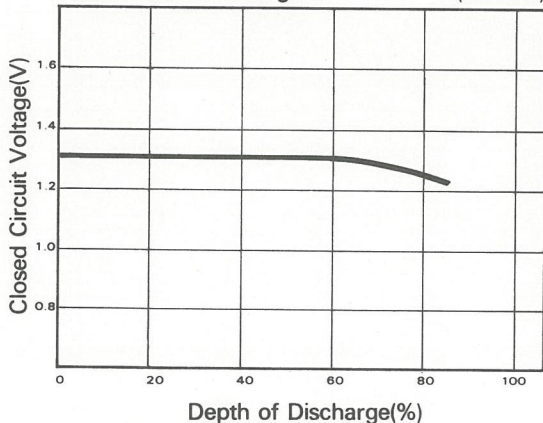

## ● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		10°C	20°C
200Ω after 5 seconds	0%	1.10V	1.30V
	40%	1.10V	1.30V
	80%	1.15V	1.25V