




System:

 Zinc/Silver Oxide
Low Drain Type


Scale 2 : 1

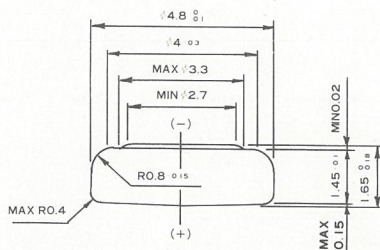

Nominal Voltage: 1.55V
Average Service Capacity: 8.0mAh
(Rated capacity at 120,000Ω load cut-off voltage 1.2V at 20°C)

Average Weight: 0.12g

Average Volume: 0.03cm³

Storage loss at 20°C(68°F): Less than 10% in 1 year

Storage loss at 60°C(140°F): Less than 10% in 20 days


Casing Negative: Nickel Clad (Gold Plated)

Positive: Nickel plated stainless Steel

(Unit: mm)

Discharge Curve

Load: 120,000Ω ● Service Life(at 20°C)

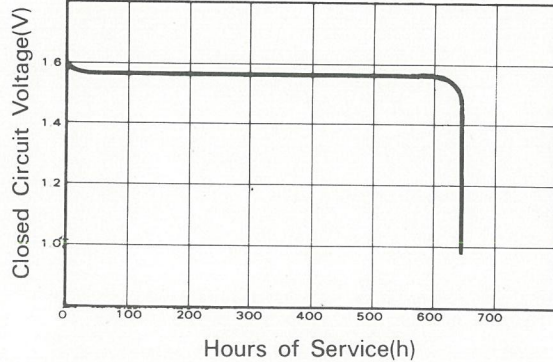


Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	13	120,000	615 hours
24h/day	5	330,000	1,690 hours
24h/day	1.0	1,500,000	11 months

*Cut-off voltage 1.2V

Closed Circuit Voltage

(at 20°C)

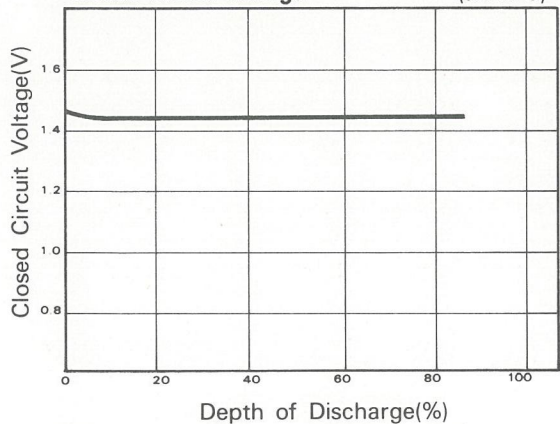
● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		-10°C	20°C
2,000Ω after 7.8 seconds	0%	1.15V	1.47V
	40%	1.10V	1.43V
	80%	1.10V	1.43V