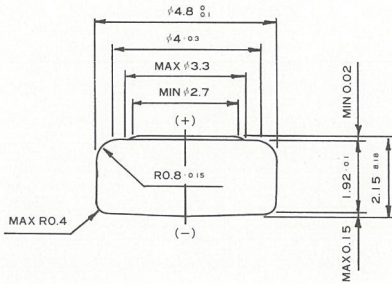




System:

 Zinc/Silver Oxide
Low Drain Type


Scale 2 : 1



Nominal Voltage: 1.55V

 Average Service Capacity: 12mAh
(Rated capacity at 82,000Ω load
cut-off voltage 1.2V at 20°C)

Average Weight: 0.17g

 Average Volume: 0.04cm³

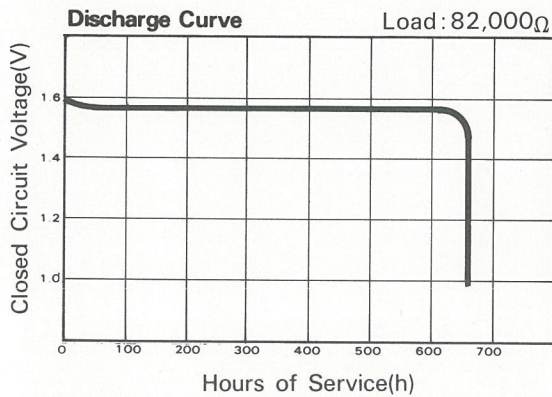
Storage loss at 20°C(68°F): Less than 10% in 1 year

Storage loss at 60°C(140°F): Less than 10% in 20 days

Casing Negative: Nickel Clad

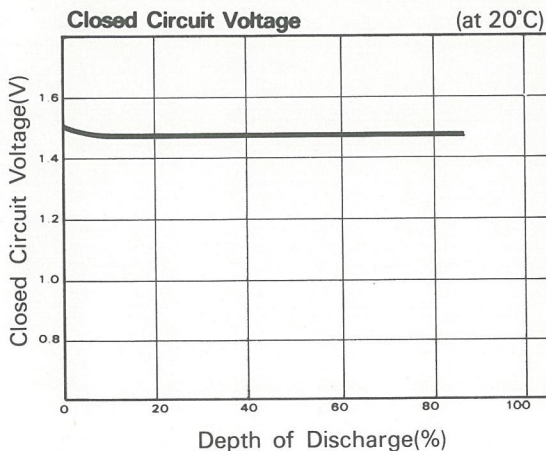
 Positive: Nickel plated stainless
Steel

(Unit: mm)


● Service Life(at 20°C)

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	19	82,000	631 hours
24h/day	5	330,000	2,535 hours
24h/day	1.0	1,500,000	16 months

*Cut-off voltage 1.2V


● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		-10°C	20°C
2,000Ω after 7.8 seconds	0%	1.04V	1.47V
	40%	1.00V	1.43V
	80%	1.43V	1.43V