




System:

Zinc/Silver Oxide
High Drain Type



Scale 2 : 1

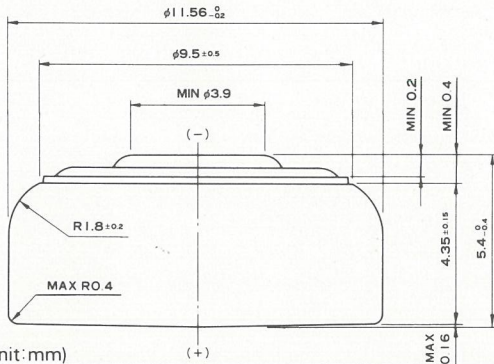

(Unit: mm)

Nominal Voltage: 1.55V

Average Service Capacity: 165mAh
(Rated capacity at 4,700Ω load
cut-off voltage 1.2V at 20°C)

Average Weight: 2.2g

Average Volume: 0.46cm³

Storage loss at 20°C(68°F): Less than 7% in 1 year


Storage loss at 60°C(140°F): Less than 7% in 20 days

Casing Negative: Nickel Clad

Positive: Nickel Plated Steel

Discharge Curve

Load: 4,700Ω

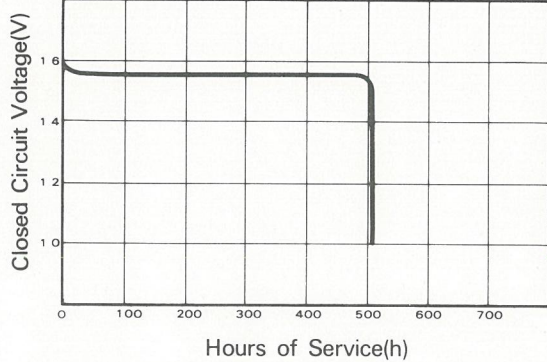


● Service Life(at 20°C)

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	330	4,700	503 hours
24h/day	105	15,000	1,570 hours
24h/day	18	89,000	12 months

*Cut-off voltage 1.2V

Closed Circuit Voltage

(at 20°C)

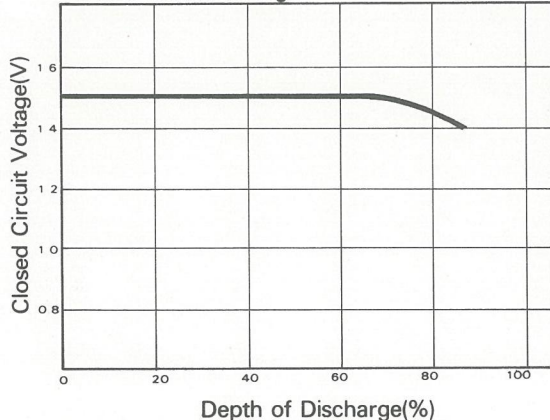

● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		-10°C	20°C
200Ω after 5 seconds	0%	1.35V	1.50V
	40%	1.35V	1.50V
	80%	1.25V	1.45V