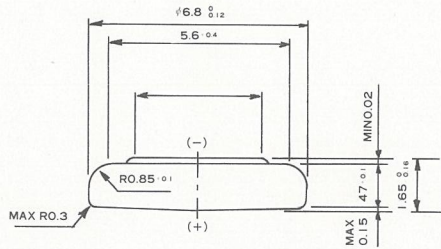




System:

 Zinc/Silver Oxide
Low Drain Type


Scale 2:1



Nominal Voltage:

1.55V

 Average Service Capacity:
(Rated capacity at 68,000Ω load
cut-off voltage 1.2V at 20°C)

15mAh

Average Weight:

0.3g

Average Volume:

 0.03cm³

Storage loss at 20°C(68°F):

Less than 7% in 1 year

Storage loss at 60°C(140°F):

Less than 7% in 20 days

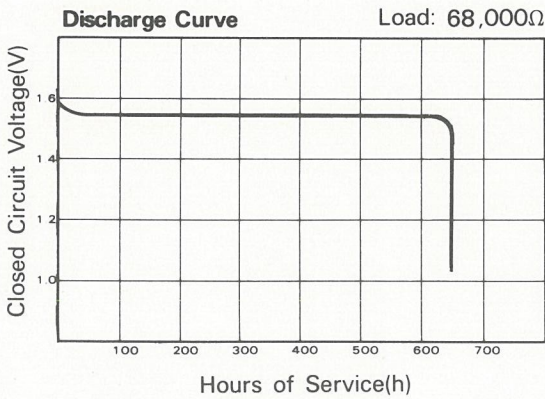
Casing Negative:

Nickel Clad

Positive:

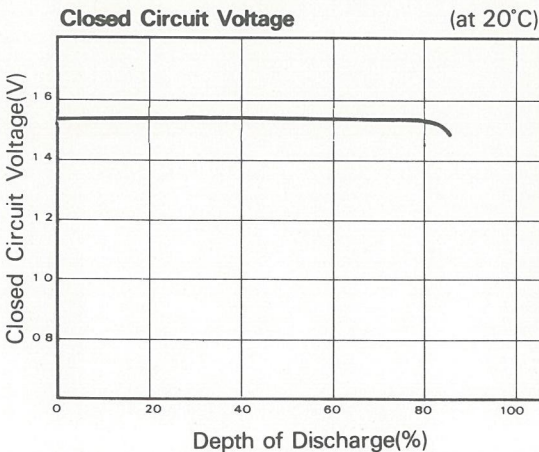
Nickel Plated Stainless Steel

(Unit:mm)


● Service Life (at 20°C)

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	23	68,000	655 hours
24h/day	5.8	270,000	2,600 hours
24h/day	1.3	1,200,000	15 months

*Cut-off voltage 1.2V


● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		10°C	20°C
2,000Ω after 7.8 milliseconds	0%	1.35V	1.55V
	40%	1.40V	1.56V
	80%	1.39V	1.55V