




System:

 Zinc/Silver Oxide  
Low Drain Type


Scale 2 : 1

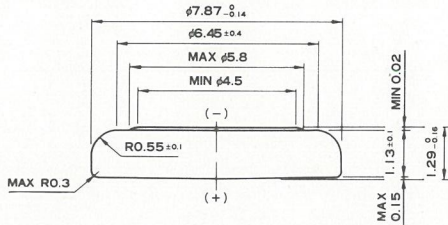

Nominal Voltage: 1.55V  
Average Service Capacity: 10mAh  
(Rated capacity at 100,000Ω load cut-off voltage 1.2V at 20°C)

Average Weight: 0.25g

Average Volume: 0.05cm<sup>3</sup>

Storage loss at 20°C(68°F):

Less than 7% in 1 year

Storage loss at 60°C(140°F):

Less than 7% in 20 days


Casing Negative:

Nickel Clad (Gold Plated)

Positive:

Nickel Plated Stainless Steel


(Unit: mm)

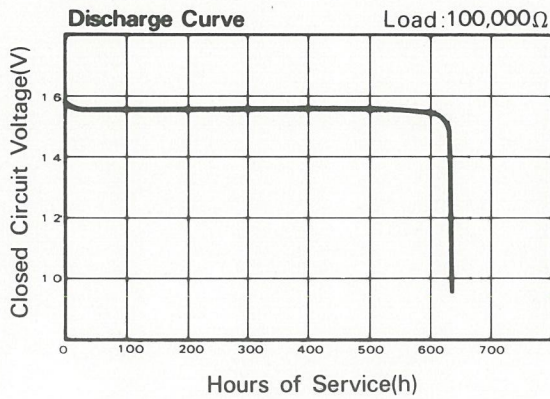

### ● Service Life (at 20°C)

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	16	100,000	641 hours
24h/day	4	390,000	2,500 hours
24h/day	1.3	1,200,000	10 months

\*Cut-off voltage 1.2V

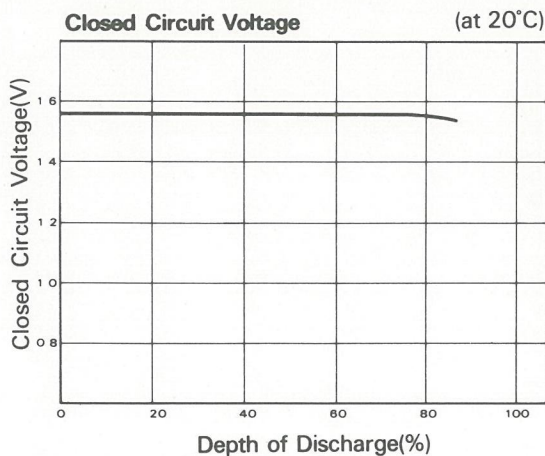

### ● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		-10°C	20°C
2,000Ω after 7.8 milliseconds	0%	1.32V	1.55V
	40%	1.42V	1.56V
	80%	1.42V	1.55V