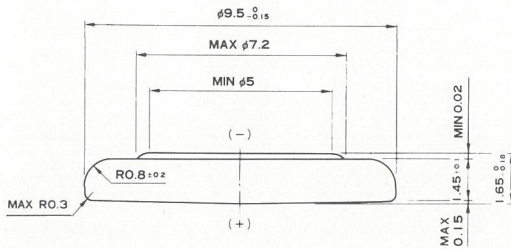




System:

 Zinc/Silver Oxide  
High Drain Type


Scale 2 : 1



(Unit: mm)

Nominal Voltage: 1.55V

 Average Service Capacity: 23mAh  
(Rated capacity at 33,000Ω load  
cut-off voltage 1.2V at 20°C)

Average Weight: 0.5g

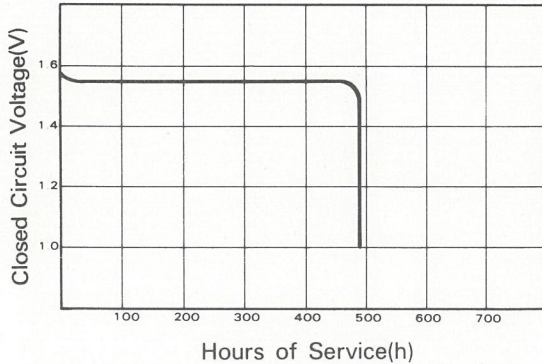
 Average Volume: 0.09cm<sup>3</sup>

Storage loss at 20°C(68°F): Less than 7% in 1 year

Storage loss at 60°C(140°F): Less than 7% in 20 days

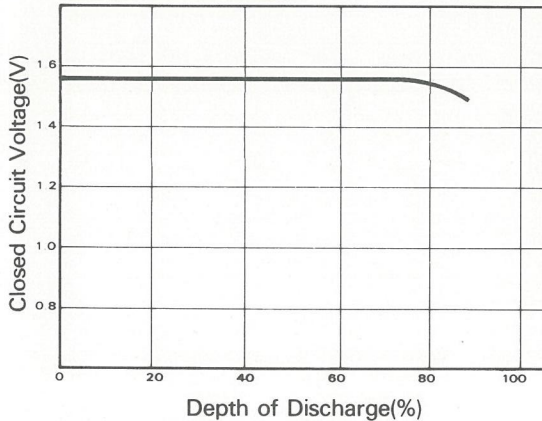
Casing Negative: Nickel Clad

Positive: Nickel Plated Steel

**Discharge Curve** Load: 33,000Ω

**● Service Life (at 20°C)**

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	47	33,000	487 hours
24h/day	13	120,000	1,765 hours
24h/day	2.8	560,000	11 months

\*Cut-off voltage 1.2V

**Closed Circuit Voltage** (at 20°C)

**● Closed Circuit Voltage**

Load	Depth of Discharge	Temperature	
		-10°C	20°C
2,000Ω after 5 seconds	0%	1.40V	1.55V
	40%	1.45V	1.57V
	80%	1.45V	1.55V