




System:

Zinc/Silver Oxide
Low Drain Type



Scale 2:1

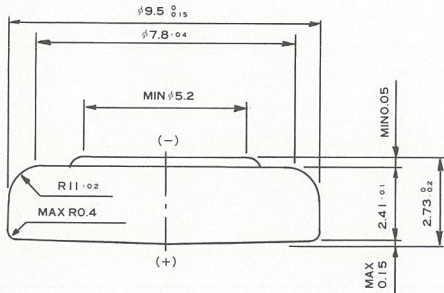

Nominal Voltage: 1.55V

Average Service Capacity: 55mAh
(Rated capacity at 15,000Ω load cut-off voltage 1.2V at 20°C)

Average Weight: 0.8g

Average Volume: 0.16cm³

Storage loss at 20°C(68°F): Less than 7% in 1 year

Storage loss at 60°C(140°F): Less than 7% in 20 days


Casing Negative: Nickel Clad

Positive: Nickel Plated Steel

(Unit:mm)

Discharge Curve

Load: 15,000Ω

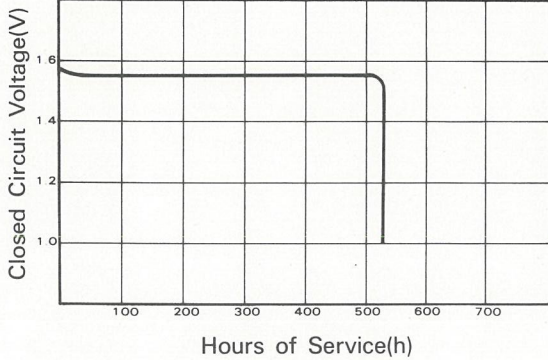


● Service Life(at 20°C)

Schedule	Starting Drains (μA)	Load (Ω)	Service Life*
24h/day	105	15,000	529 hours
24h/day	28	56,000	1,980 hours
24h/day	5.8	270,000	13 months

*Cut-off voltage 1.2V

Closed Circuit Voltage

(at 20°C)

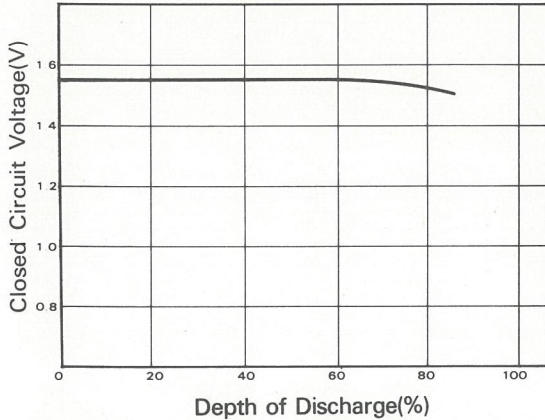

● Closed Circuit Voltage

Load	Depth of Discharge	Temperature	
		-10°C	20°C
2,000Ω after 7.8 milliseconds	0%	1.50V	1.57V
	40%	1.50V	1.57V
	80%	1.41V	1.56V