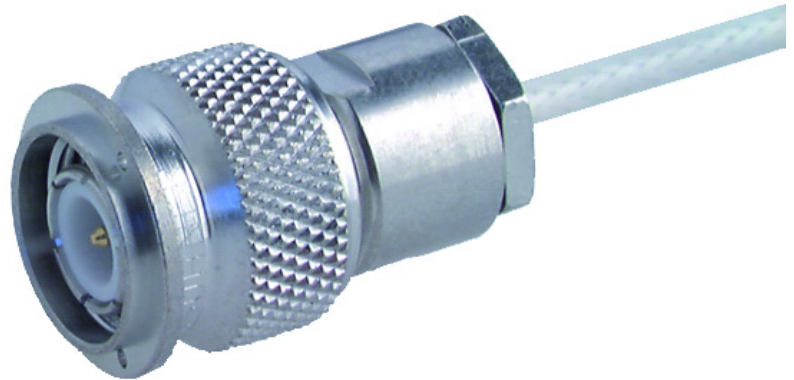


**COAXIAL CONNECTOR, TNC, 75 Ohm, Straight cable plug (male)**

11\_TNC-75-4-2/133\_N

**Properties**

- Threaded coupling mechanism improves control over the interface dimensions
- Used under a higher environmental load than BNC
- Available for 50 ohm and 75 ohm applications
- Applicable in frequencies up to 11 GHz

**Product configuration**

Interface type	Gender	Standard
TNC	plug	IEC 60169-17_MIL-STD-348A/313_CECC 22200

**Interface and material data**

Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	

**Electrical data**

Impedance	75 $\Omega$
Interface frequency	1 GHz

**Mechanical data**

Weight	0.0192 kg
Mating cycles	500
Cable entry centre contact	soldered
Cable entry outer contact	clamped

**Environmental data**

Operation temperature	-65 °C ... 165 °C
-----------------------	-------------------

**Ordering Information Table**

Item number	Item description	Packaging type
22543477	11_TNC-75-4-2/133_NE	Single

**COAXIAL CONNECTOR, TNC, 75 Ohm, Straight cable plug (male)**

11\_TNC-75-4-2/133\_N

<b>Suitable cables</b>	
Cable group	X16 - 4 mm / 75 Ohm --- obsolete (integrated in U18)
	U17 - 4 mm / 75 Ohm
	U16 - 4 mm / 75 Ohm
Suitable cables	GX_04273
	RG_59_B/U
<b>Additional Information</b>	
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P3371 / Date of publication: 25.11.2023 / uncontrolled copy