


WPC-W-P-TX-CF-032 Temp. Specification

1. Explanation of Part Number:

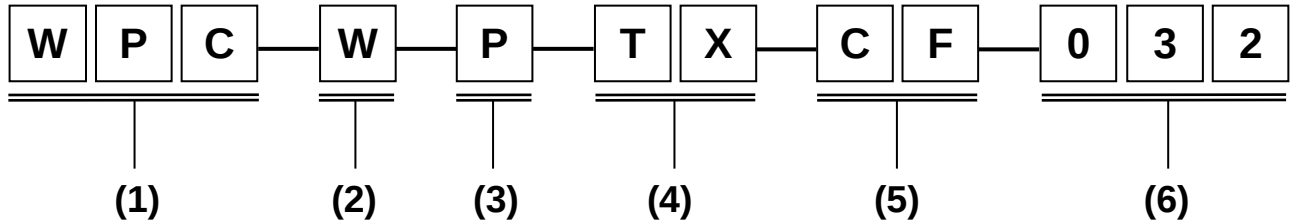

- (1) Product type : Wireless Power Charging
- (2) Mode : WPC
- (3) Active or passive : Passive
- (4) Type : Power Transmitter
- (5) Antenna material or type : COIL + Ferrite
- (6) Suffix : Serial number

2. Electrical Specification:

Test Item	Test Condition	Specification
Inductance	100K Hz, 1V	$6.7 \pm 5\% \mu\text{H}$
Q	100K Hz, 1V	$> 60.$
DCR	@25°C	55mΩ(MAX)

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = $\pm$ X.X = $\pm$ X.XX =
ANGLES = $\pm$ HOLE DIA = $\pm$



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY: 马宗演

CHECKED BY: Ricky

DESIGNED BY: Ricky

APPROVED BY: YQ.He

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WPC-W-P-TX-CF-032 Specification

DOCUMENT
NO.

ENS000142830

SPEC REV.
A0

3. Assemble Dimension:

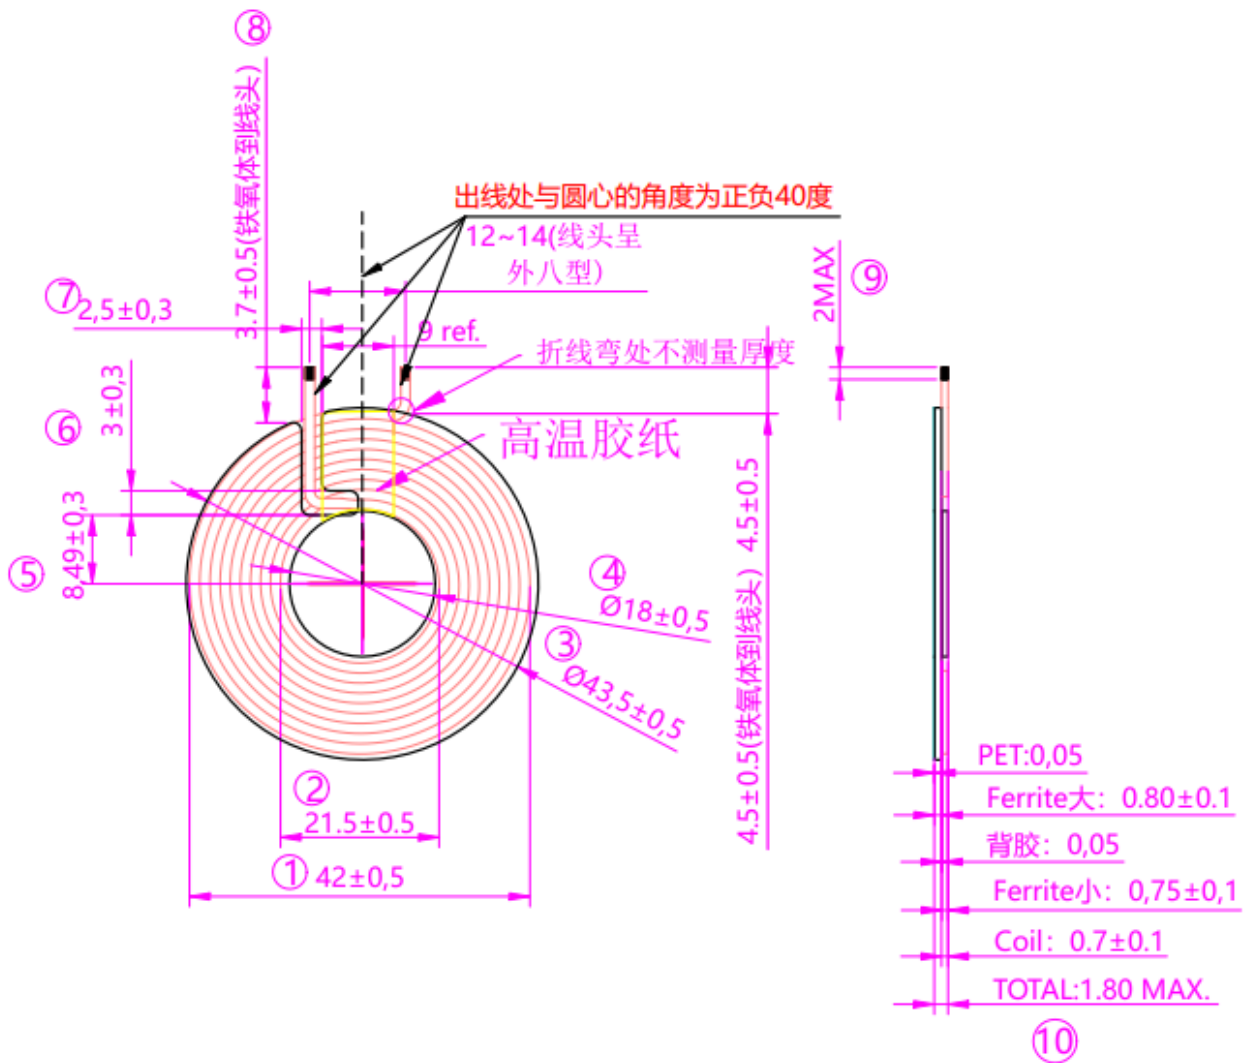

4. Operating & Storage Condition:

- a.) OPERATING TEMPERATURE RANGE: -25°C~+75°C
- b.) STORAGE TEMPERATURE RANGE: -20°C~+75°C; HUMIDITY:50% MAX.

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = ± X.X = ± X.XX =
ANGLES = ± HOLE DIA = ±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY: 马宗演

CHECKED BY: Ricky

DESIGNED BY: Ricky

APPROVED BY: YQ.He

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WPC-W-P-TX-CF-032 Specification

DOCUMENT
NO.

ENS000142830

SPEC REV.
A0

5. Packing

Follow the supplier's packaging method

主题/Subject: 包装 Product Name 產品名稱: WPC-W-P-TX-CF-032

包装封箱:

1. 每孔7pcs, 364pcs/盘, 每3摞为一箱, 364pcs/盘*3盘=1092pcs/箱,

最上一层加一块纸板, 并用封箱胶封住, 如图1

2. 待QA检查通过后再用460*275*190mm (内尺寸) 的包装

箱包装, 并封箱贴上出货标签、合格标签和ROHS标签.



图1

注意事项/Notes: 1. 一定要看好外观, 是否符合图纸的要求

料号/Material No.	品名/Part Name	用量/Qty	备注/Remark	变更版本 /Rev.	变更日期 /Date	变更内容/Change History
77-0102	珍珠棉包装盘460*275*65mm (52格) 表面珍珠棉58mm, 底部纸板5mm	1/364				
76-0073	纸板460*270*5mm K=K 厚度: 5mm	1/1092				
71-0009	外箱460*275*190mm (内尺寸) K=K	1/1092				

工具及仪器/Tool & Apparatus:

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = $\pm$ X.X = $\pm$ X.XX =
ANGLES = $\pm$ HOLE DIA = $\pm$

SCALE : N/A

UNIT : mm

DRAWN BY: 马宗演

CHECKED BY: Ricky

DESIGNED BY: Ricky

APPROVED BY: YQ.He



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WPC-W-P-TX-CF-032 Specification

DOCUMENT
NO.

ENS000142830

SPEC REV.
A0