

LIGHT ENGINE COB UVC 38mm x 38mm 1,750mW


Issue Date	August, 2021
Issued by	Malassise, V.

Applications

- Medical sterilization
- Drinking water disinfection
- Infectious disease control
- Food processing sterilization
- Air sterilization

Characteristics

- UV Type - UVC
- Wavelength – 260-270nm
- Efficacy - up to 2.0%
- 05 years warranty

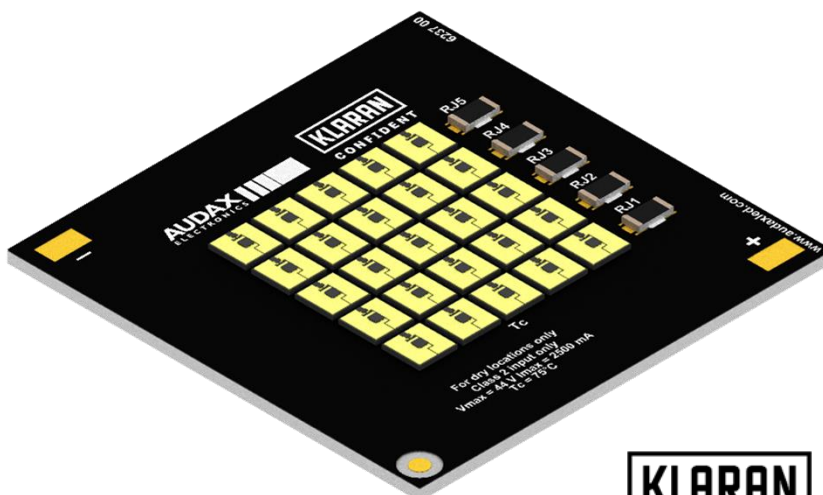

KLARAN
CONFIDENT

DRIVING CURRENTS

Parameter	Nominal	Max
LIGHT ENGINE COB UVC 38mm x 38mm 1,750mW	2,000 mA	2,400 mA

MODULE TEMPERATURES

Parameter	Nominal	Max
Ts (temperature at Ts point)	40 °C	60 °C

PRODUCT PART NUMBER

80367200100

UVC – 260-270nm

TECHNICAL INFORMATION


UV Type	Wavelength (nm)	#LEDs	Forward Current (mA)	Rad. Power (mW)	Forward Voltage (V)	Power (W)	Ts (°C)	EFF (%)
UVC	260-270	25	1,750	1,120.0	37.5	65.0	40	2.0
			2,500	1,750.0	40.0	100.0	40	1.8
			3,000	1,850.0	45.0	135.0	40	1.4

LED TYPE


Manufacturer: Klaran

LED Series: KL265


Rad. Power (mW) x Forward Current (mA) (Ts 40°C)

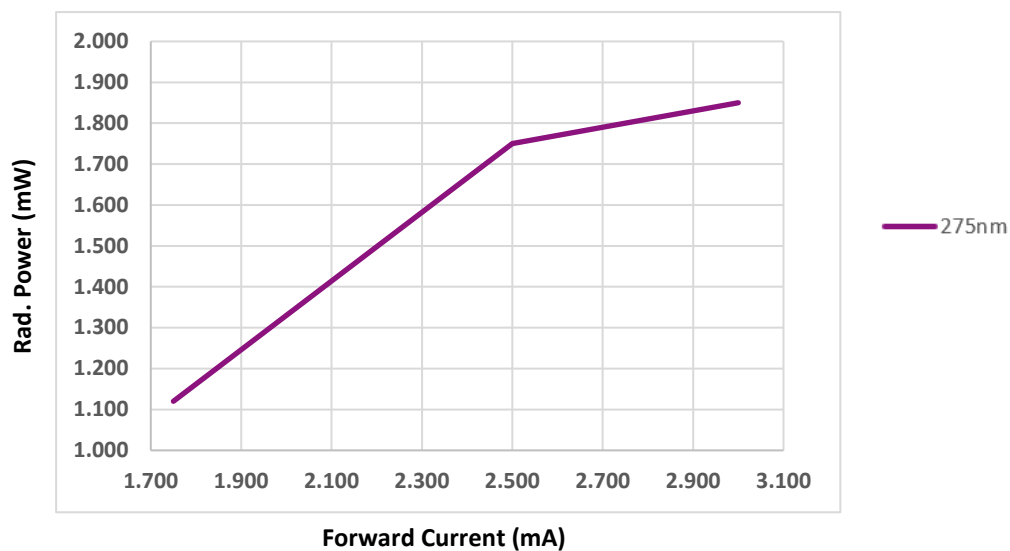


Forward Voltage (V) x Forward Current (mA) (Ts 40°C)

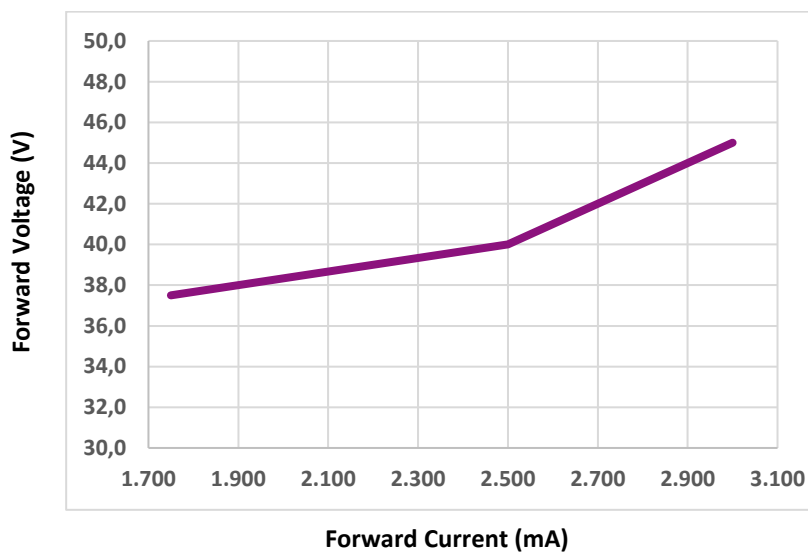


SCHEMATICS

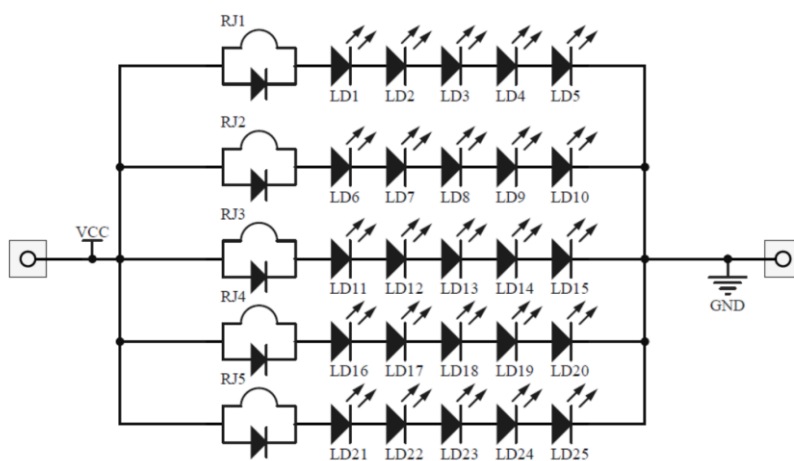

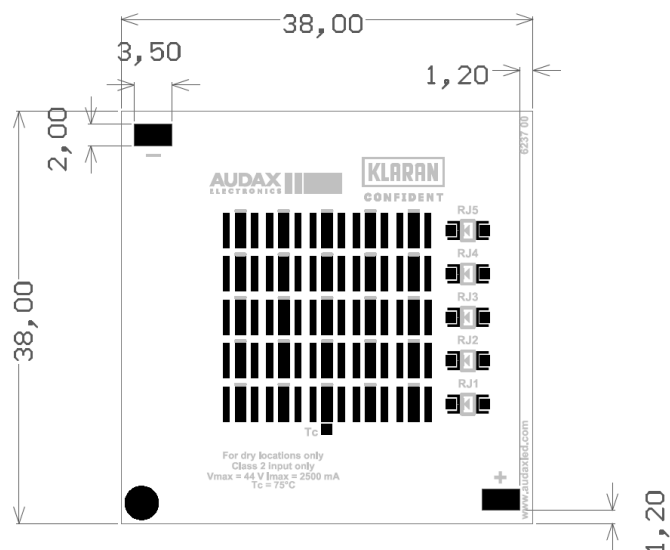

WIRING

Specification item	Value	Unit	Condition
Input wire cross- section	0.25...0.75 18...24	mm ² AWG	Solid wire
Input wire strip length	7.5...8.5	mm	Solid wire
Input wire cross-section	0.33...0.5 20...22	mm ² AWG	Stranded wire
Input wire strip length	7.5...8.5	mm	Stranded wire

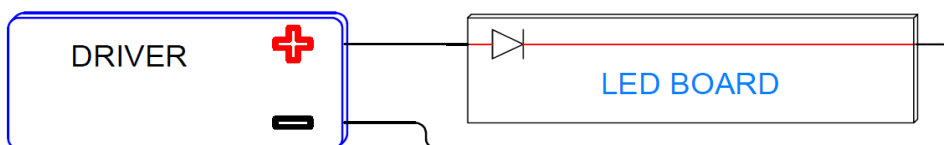

COMPATIBLE OPTICS

Manufacturer	Part Number	Color	Beam
LEDiL	F15074_ZORYA-SC	Clear	~340°
LEDiL	F14627_STELLA-FRESNEL	Clear	~25°

WARNING

