

LIGHT ENGINE 560 x 20mm 1.550lm

Issue Date	Jul - 2017
Issued by	Wilbur C.

Applications

- Troffers
- Battens
- Retrofit T8 / HO
- Linear Luminaire



Characteristics

- Module Efficacy – up to 153 lm/W
- L70 > 50.000 hours
- CRI > 80 (Typ.85)
- 03 SDCM
- CCTs 3.000K / 4.000K / 5.000K
- 05 years warranty



Zhaga

DRIVE CURRENTS

Parameter	Nominal	Max
Light Engine Linear Fit DLC	700 mA	700 mA

MODULE TEMPERATURES

Parameter	Nominal	Max
Tc (case temperature at Tc point)	60 °C	85 °C


PRODUCT PART NUMBER

80085000100	80085100100	80085200100
3.000 K	4.000 K	5.000 K


TECHNICAL INFORMATION

CCT	LED Driver Current (mA)	# LEDs	Luminous Flux (lm)*	Forward Voltage (V)	LED Forward Current (mA)	TC (°C)	Power (W)	Efficacy (lm/W)*
3.000 K	350	21	910	16,6	50	75	5,8	157
3.000 K	500	21	1.276	17,1	71	75	8,5	149
3.000 K	700	21	1.737	17,6	100	75	12,3	141
4.000 K	350	21	955	16,6	50	75	5,8	164
4.000 K	500	21	1.340	17,1	71	75	8,5	157
4.000 K	700	21	1.824	17,6	100	75	12,3	148
5.000 K	350	21	999	16,6	50	75	5,8	172
5.000 K	500	21	1.393	17,1	71	75	8,5	163
5.000 K	700	21	1.884	17,6	100	75	12,3	153

Luminous Flux (lm) x Forward Current (mA) (TC 60°C)

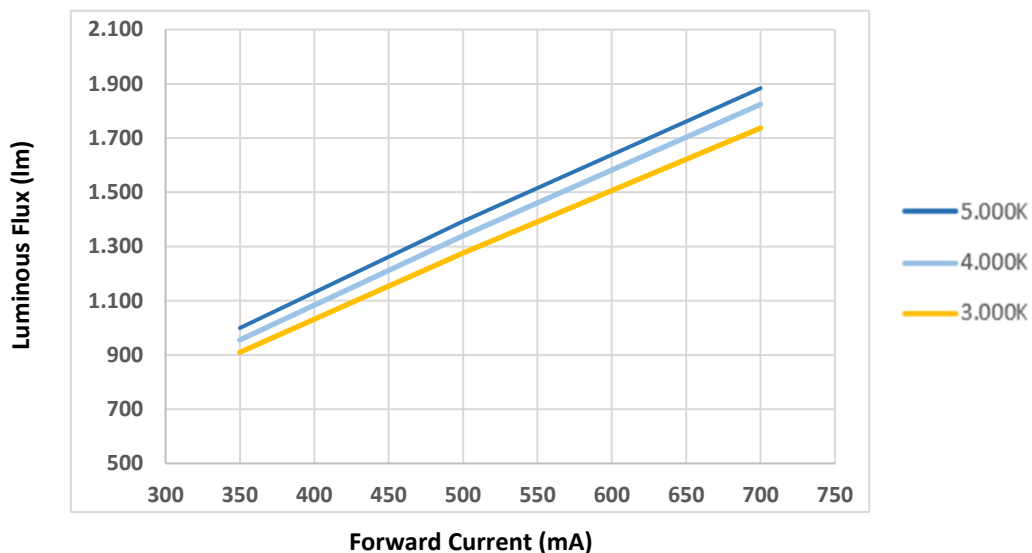

Forward Voltage (V) x Forward Current (mA) (TC 60°C)

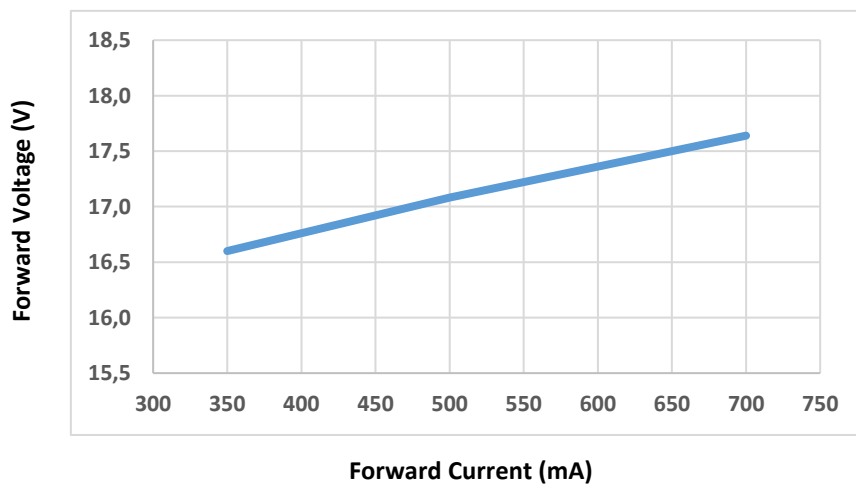


LED TYPE

Manufacturer: Nichia Corporation

LED Series: 757

MECHANICAL DRAWING

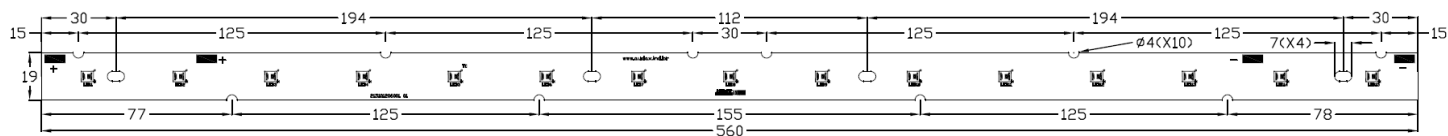


Unit: mm

WIRING

Specification item	Value	Unit	Condition
Input wire cross- section	0.25...0.75 18...24	mm ² AWG	Solid wire
Input wire strip length	7.5...8.5	mm	Solid wire
Input wire cross-section	0.33...0.5 20...22	mm ² AWG	Stranded wire
Input wire strip length	7.5...8.5	mm	Stranded wire

DRIVER FOR 2 LIGHT ENGINES: LED DRIVER 21W 220-240VAC ([EIP021C0700L2](#))

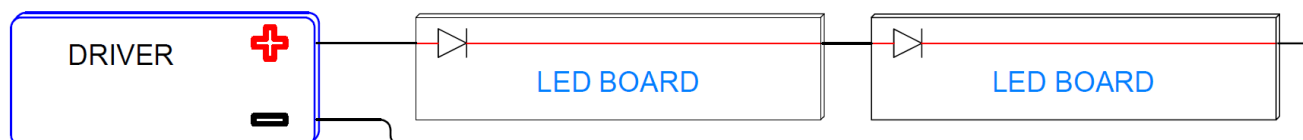

DRIVER FOR 3 LIGHT ENGINES: LED DRIVER 40W 220-240VAC ([EIP040C0700L1](#))

