

SpiceLED

Like spice, its diminutive size is a stark contrast to its standout performance in terms of brightness, durability and reliability. Despite being the smallest in size yet the SpiceLED packs a powerful performance and is a highly reliable design device. Its versatility enables its application in automotive appliances, key-pad illumination, hand-held devices such as PDAs, notebooks, compact back-lighting applications, consumer appliances, office equipment, audio and video equipment.



Features:

- > High brightness surface mount LED.
- > Super wide viewing angle of 160°.
- > Equivalent to 0603 package outline. Copper lead-frame construction.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Compliance to automotive standard; AEC-Q102.
- > Superior Corrosion Resistant.



Applications:

- > Automotive: interior applications, eg: switches, telematics, climate control system, dashboard, etc.
- > Consumer Appliances: LCD illumination as in PDAs, LCD TV.
- > Communication: indicator and backlight in mobilephone.
- > Display: full color display video notice board.
- > Industry: white goods (eg: Oven, microwave, etc.).

Optical Characteristics at Tj=25°C

Part Number	Color	Viewing Angle°	Luminous Intensity @ 20mA IV (mcd) Appx. 1.1		
			Min.	Typ.	Max
SSS-CLD-N2P-1	Super Red, 632 nm	160	35.5	56.0	71.5
SSS-CLD-P2Q-1	Super Red, 632 nm	160	56.0	90.0	112.5
SSR-CLD-PQ1-1	Red, 625 nm	160	45.0	71.5	90.0
SSA-CLD-P2Q-1	Amber, 615nm	160	56.0	90.0	112.5
SSO-CLD-P2Q-1	Orange, 605 nm	160	56.0	90.0	112.5
SSO-CLD-QR1-1	Orange, 605 nm	160	71.5	112.5	140.0
SSY-CLD-P2Q-1	Yellow, 587 nm	160	56.0	90.0	112.5
SSY-CLD-Q2R-1	Yellow, 587 nm	160	90.0	135.0	180.0
SSG-CLD-M2N-1	Green, 570 nm	160	22.4	35.5	45.0
SSP-CLD-KL1-1	Pure Green, 560 nm	160	7.2	11.2	14.0

Electrical Characteristics at Tj=25°C

Part Number	Vf @ If = 20mA Appx. 3.1			Vr @ Ir = 10uA Appx. 6.1
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
SSx-CLD	1.8	2.0	2.4	12

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	30	mA
Peak pulse current; (Ts = 55°C, tp ≤ 100µs, Duty cycle = 0.03)	100	mA
Reverse voltage <i>Appx.6.1</i>	12	V
ESD threshold (HBM)	2000	V
LED junction temperature	110	°C
Operating temperature	-40 ... +105	°C
Storage temperature	-40 ... +110	°C
Power dissipation (at room temperature)	80	mW
Thermal resistance (Rated current = 20mA, Ts = 25 °C)		
- Junction / ambient, R _{th JA}	450	K/W
- Junction / solder point, R _{th JS}	250	K/W

Wavelength Grouping


Color	Group	Wavelength distribution (nm) <i>Appx. 2.2</i>
SSS; Super Red	Full	625 - 640
SSR; Red	Full	620 - 630
SSA; Amber	Full	610 - 621
	W	610 - 615
	X	615 - 621
SSO; Orange	Full	600 - 612
	W	600 - 603
	X	603 - 606
	Y	606 - 609
	Z	609 - 612
SSY; Yellow	Full	582 - 594
	W	582 - 585
	X	585 - 588
	Y	588 - 591
	Z	591 - 594
SSG; Green	Full	564.5 - 576.5
	W	564.5 - 567.5
	X	567.5 - 570.5
	Y	570.5 - 573.5
	Z	573.5 - 576.5
SSP; Pure Green	Full	552.5 - 564.5
	W	552.5 - 555.5
	X	555.5 - 558.5
	Y	558.5 - 561.5
	Z	561.5 - 564.5

Luminous Intensity Group at Tj=25°C

Brightness Group	Luminous Intensity <i>Appx. 1.1</i> IV (mcd)
K1	7.20...9.00
K2	9.00...11.20
L1	11.20...14.00
M2	22.40...28.50
N1	28.50...35.50
N2	35.50...45.00
P1	45.00...56.00
P2	56.00...71.50
Q1	71.50...90.00
Q2	90.00...112.50
R1	112.50...140.00
R2	140.00...180.00


Relative Luminous Intensity Vs Forward Current

$$I_V/I_V(20\text{mA}) = f(I_F); T_j = 25^\circ\text{C}$$

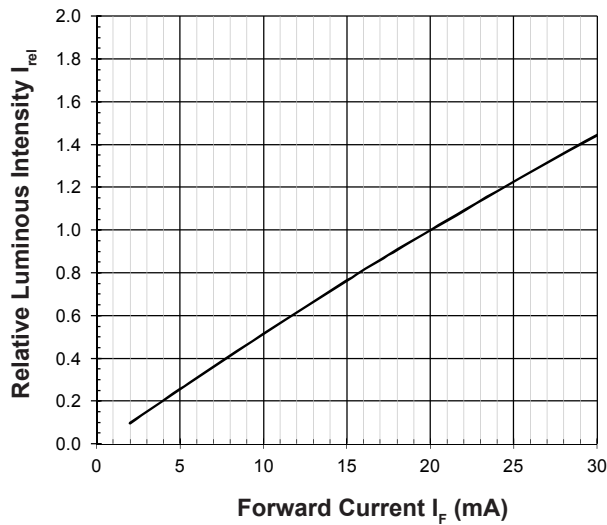


Forward Current Vs Forward Voltage

$$I_F = f(V_F); T_j = 25^\circ\text{C}$$

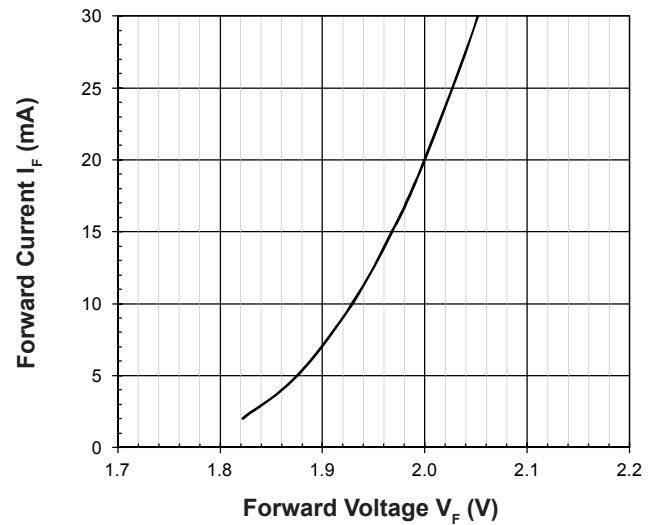


Maximum Current Vs Temperature

$$I_F = f(T)$$

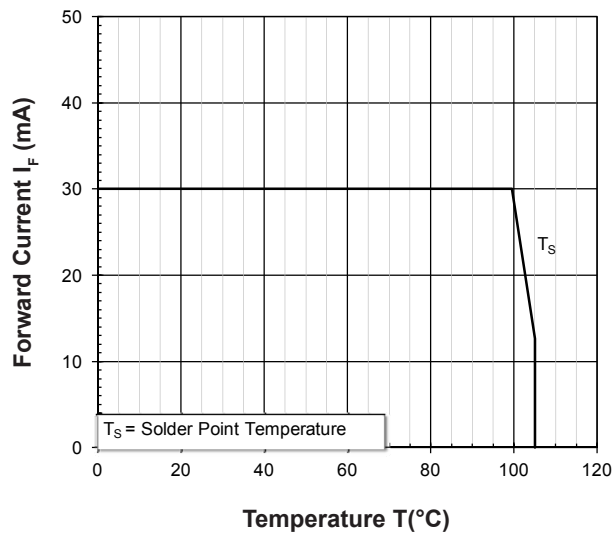


Relative Spectral Emission

$$I_{rel} = f(\lambda); T_j = 25^\circ\text{C}; I_F = 20\text{mA}$$

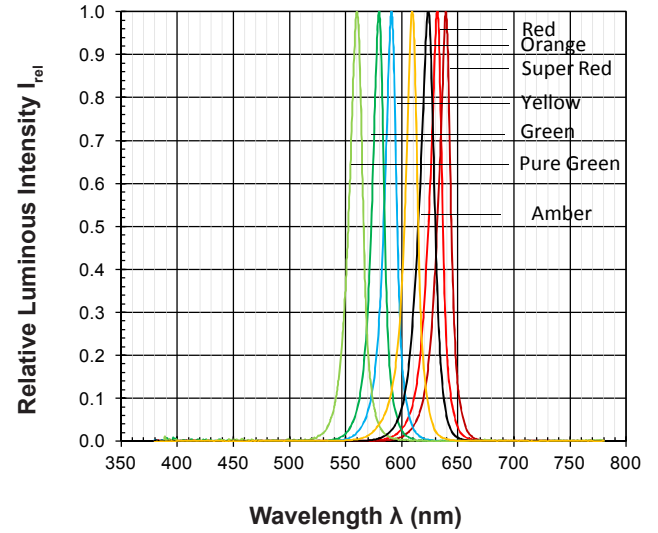


Allowable Forward Current Vs Duty Ratio

$$(T_s = 55^\circ\text{C}; t_p \leq 100\mu\text{s})$$

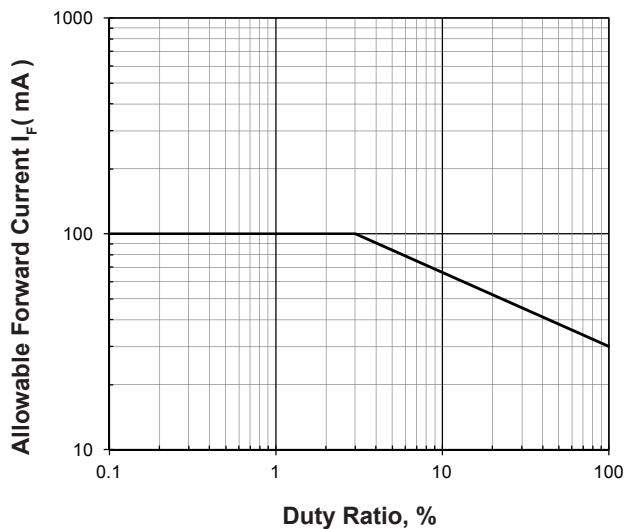


Radiation Pattern

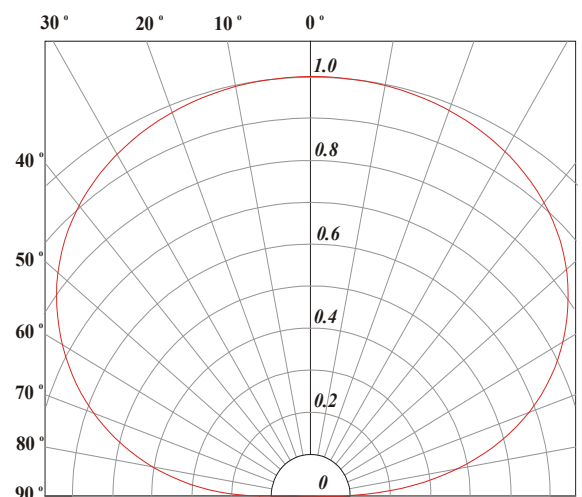


Forward Voltage Vs Junction Temperature

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 20\text{mA}$$

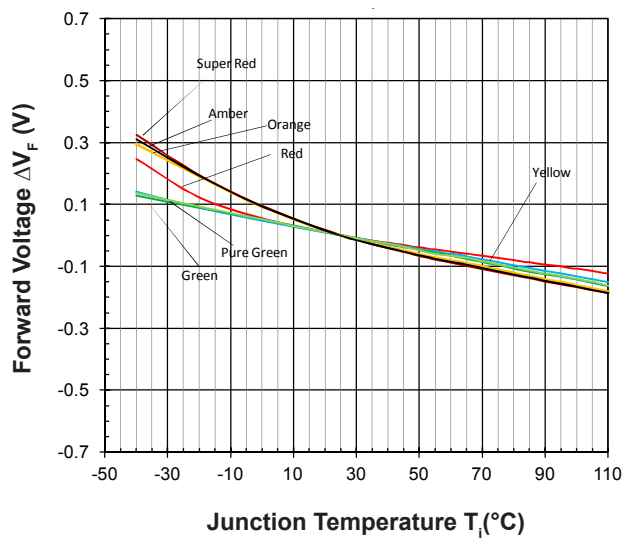


Relative Luminous Intensity Vs Junction Temperature

$$I_V/I_V(25^\circ\text{C}) = f(T_j); I_F = 20\text{mA}$$

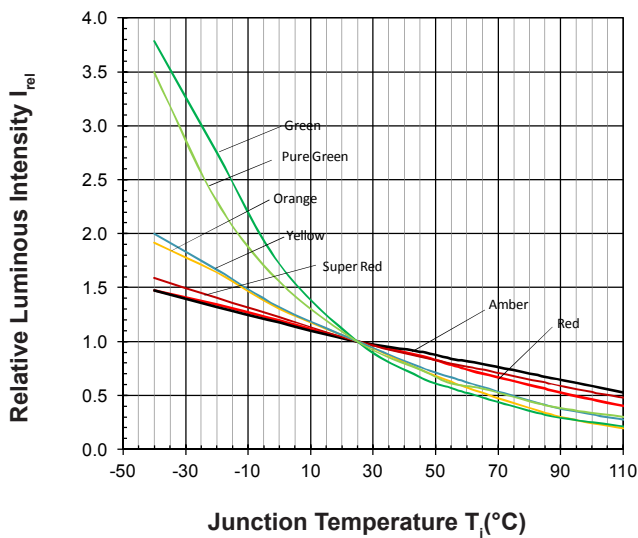


Wavelength Vs Junction Temperature

$$\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j); I_F = 20\text{mA}$$

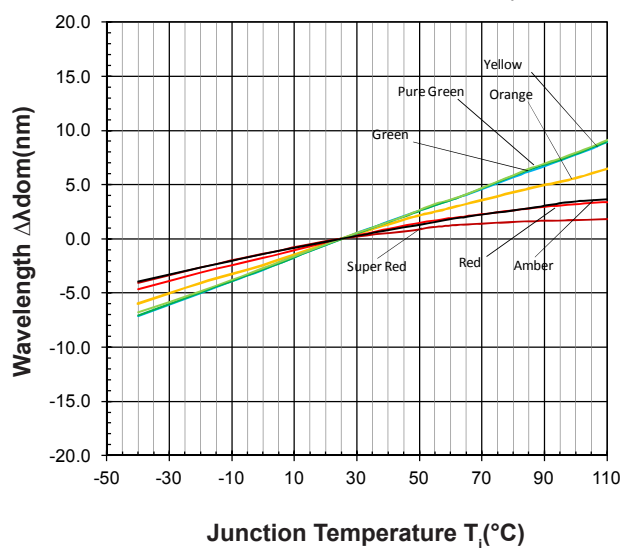


SpiceLED • AllnGaP S-Spice : SSx-CLD Package Outlines

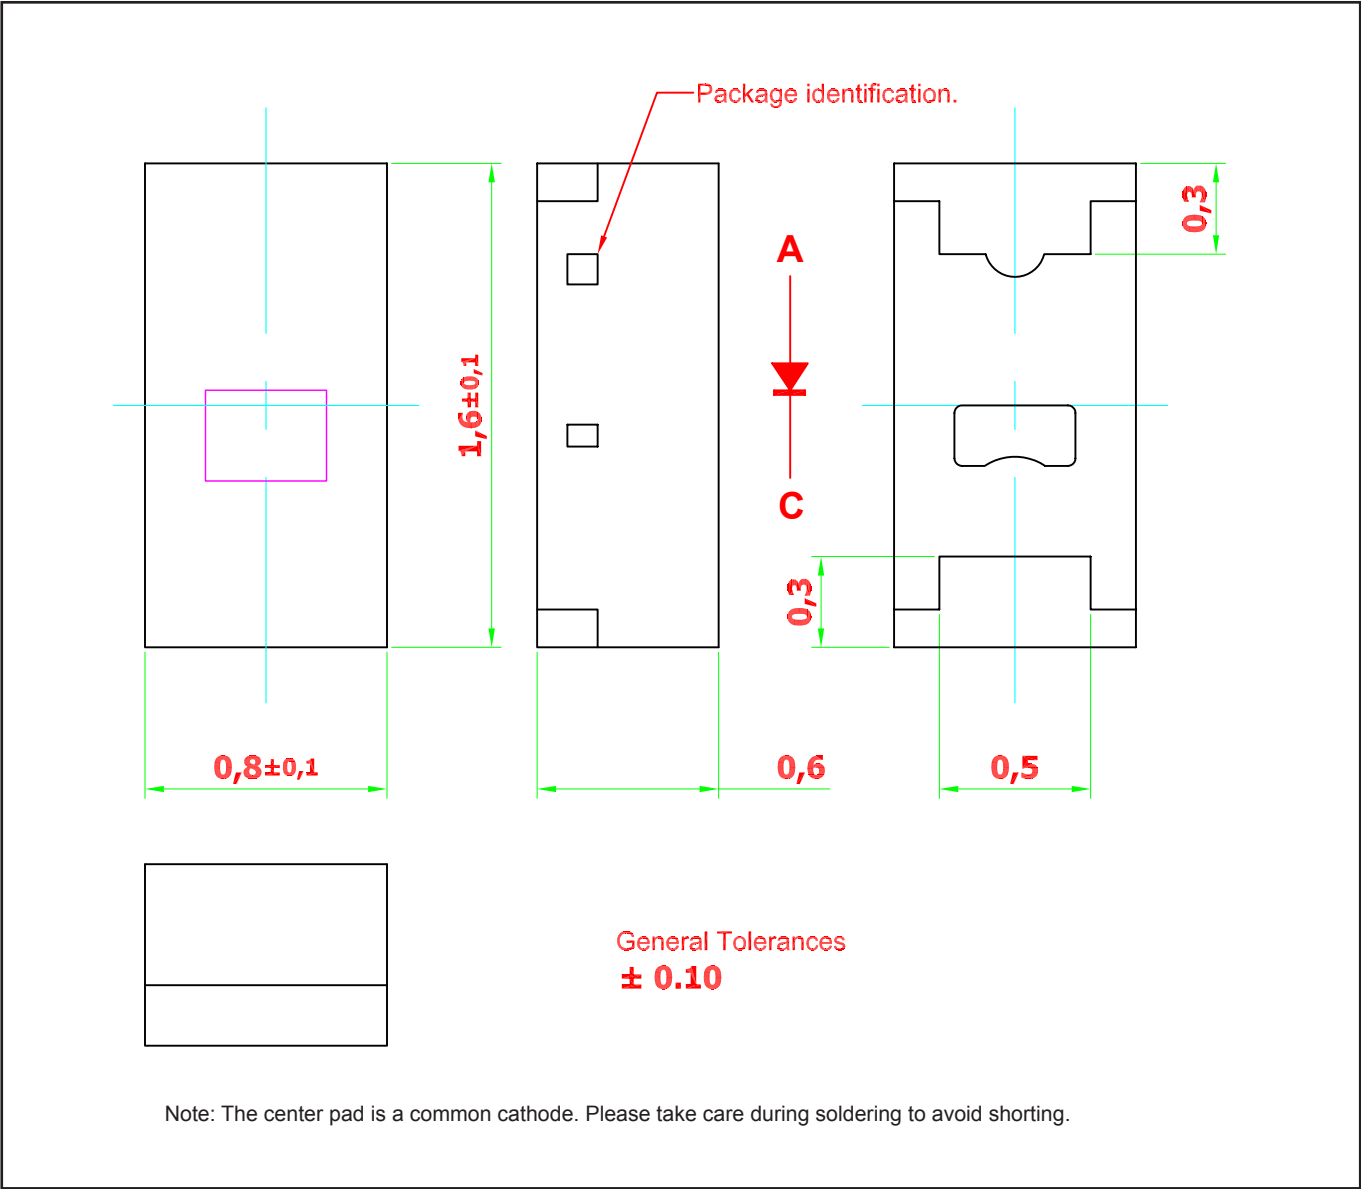

Material

Material	
Lead-frame	Cu Alloy With Au Plating
Package	High Temperature Resistant Epoxy Resin


Recommended Solder Pad

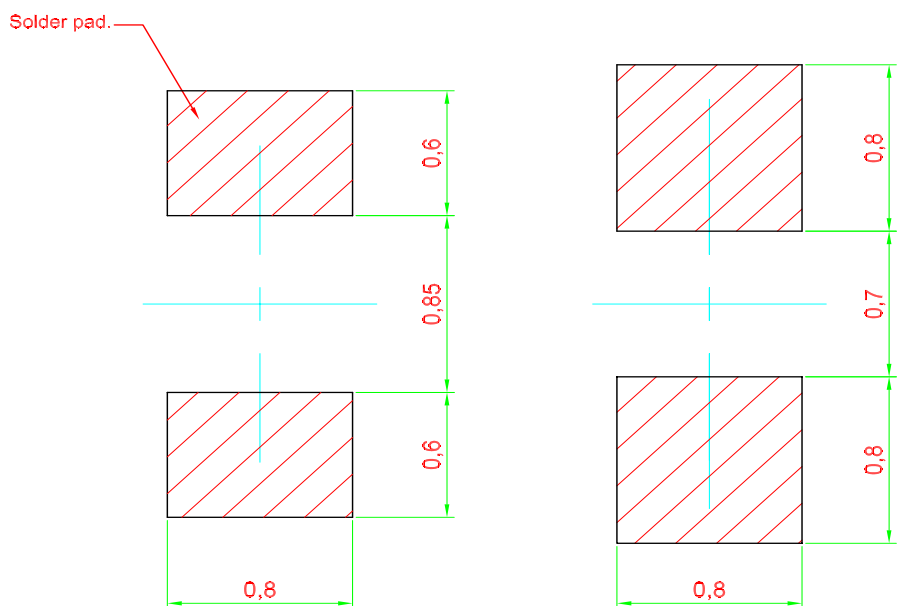

Recommended Solder-pad


Alternative Solder-pad
Compatible to ChipLED 0603

Note: Component is based on a new package platform, which features "Bottom Only Terminations". Solder joints are only formed at the bottom of the component and solder fillet will not be observable as the sides of the component.


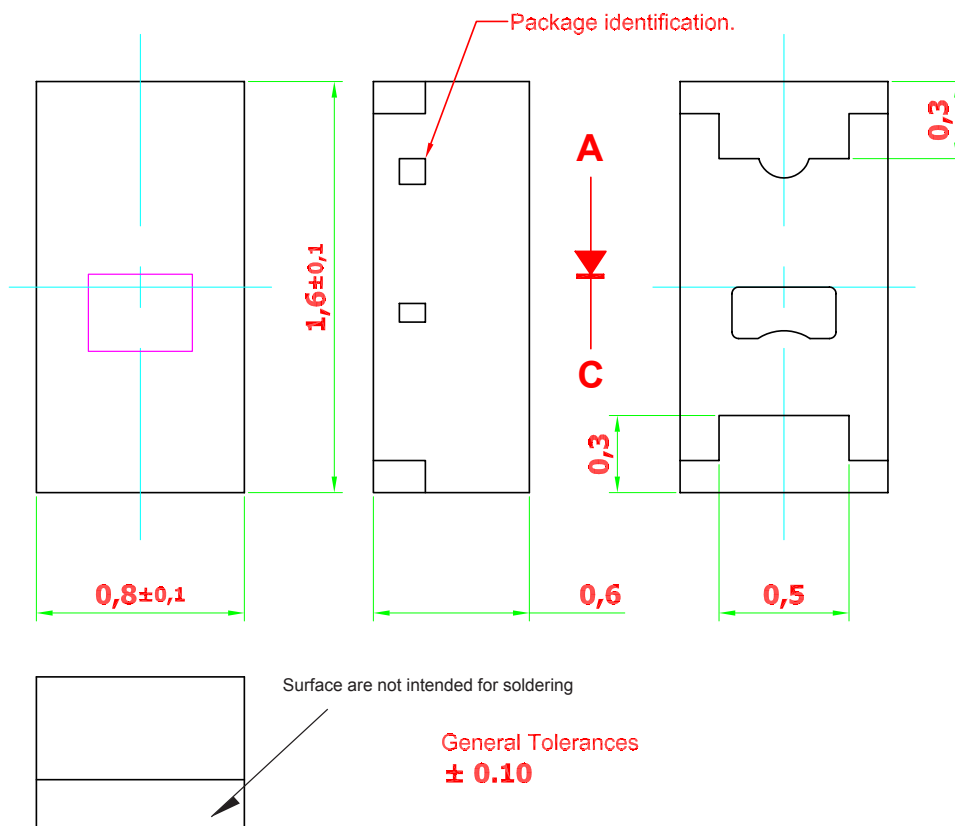


General Tolerances
 ± 0.10

Taping and orientation

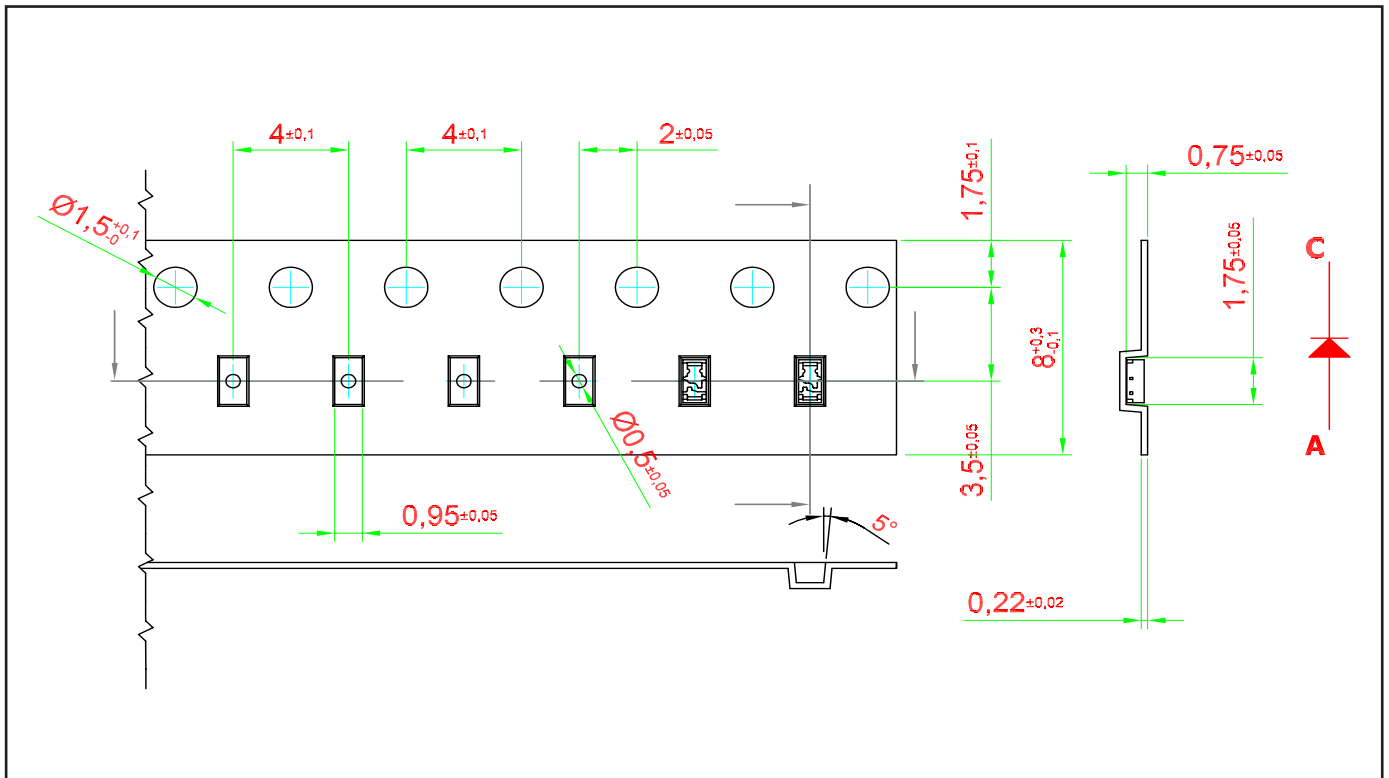

Packaging Specification

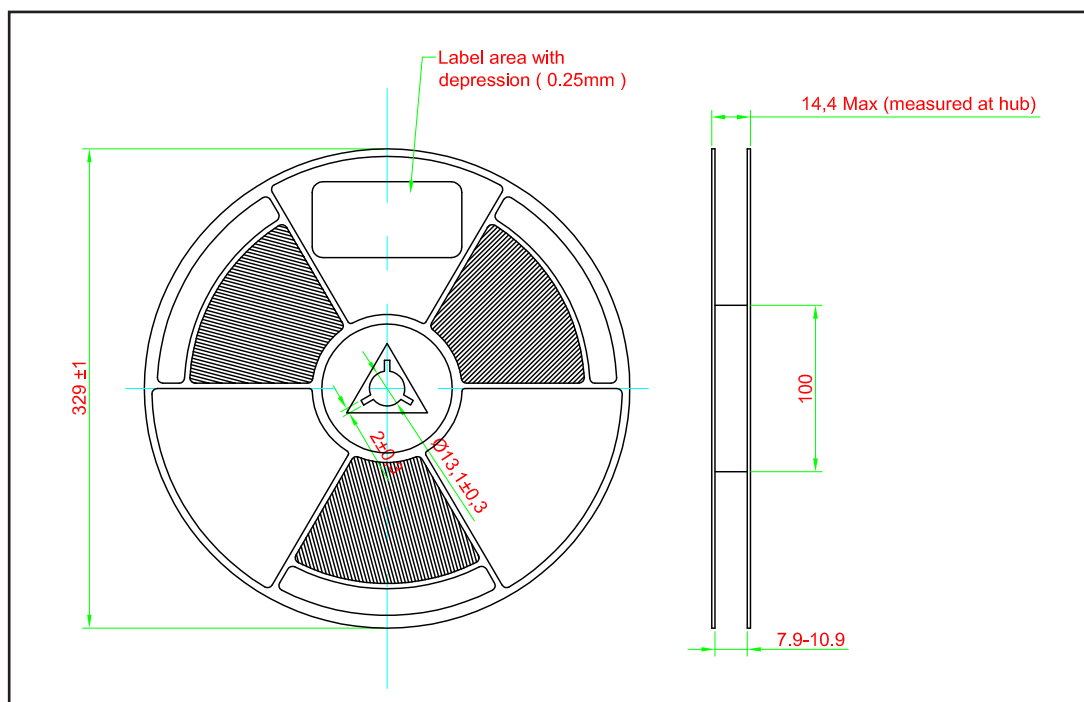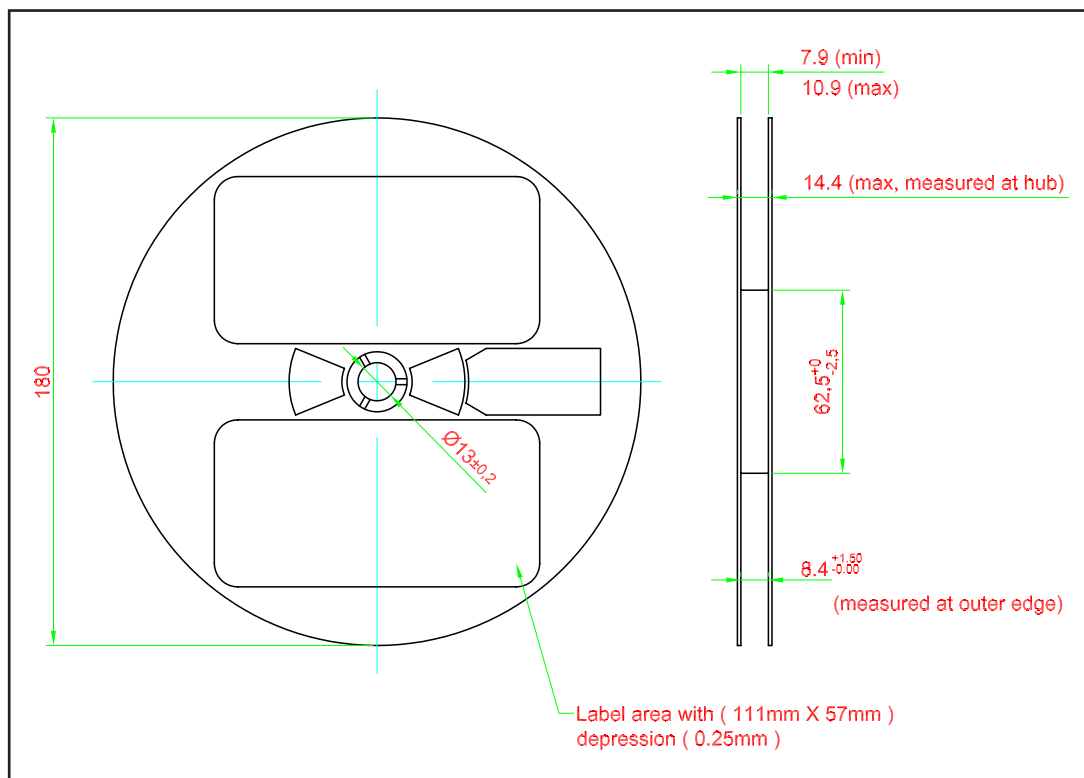


	Reel Diameter (mm)	Quantity (pcs)	*Ordering Number
Standard Packing	180	5000	SSx-CLD-XXX-X
Optional Packing	329	18000	SSx-CLD-XXX-X-M

Notes:

* For ordering purpose only. Please consult sales and marketing for details.


Packaging Specification

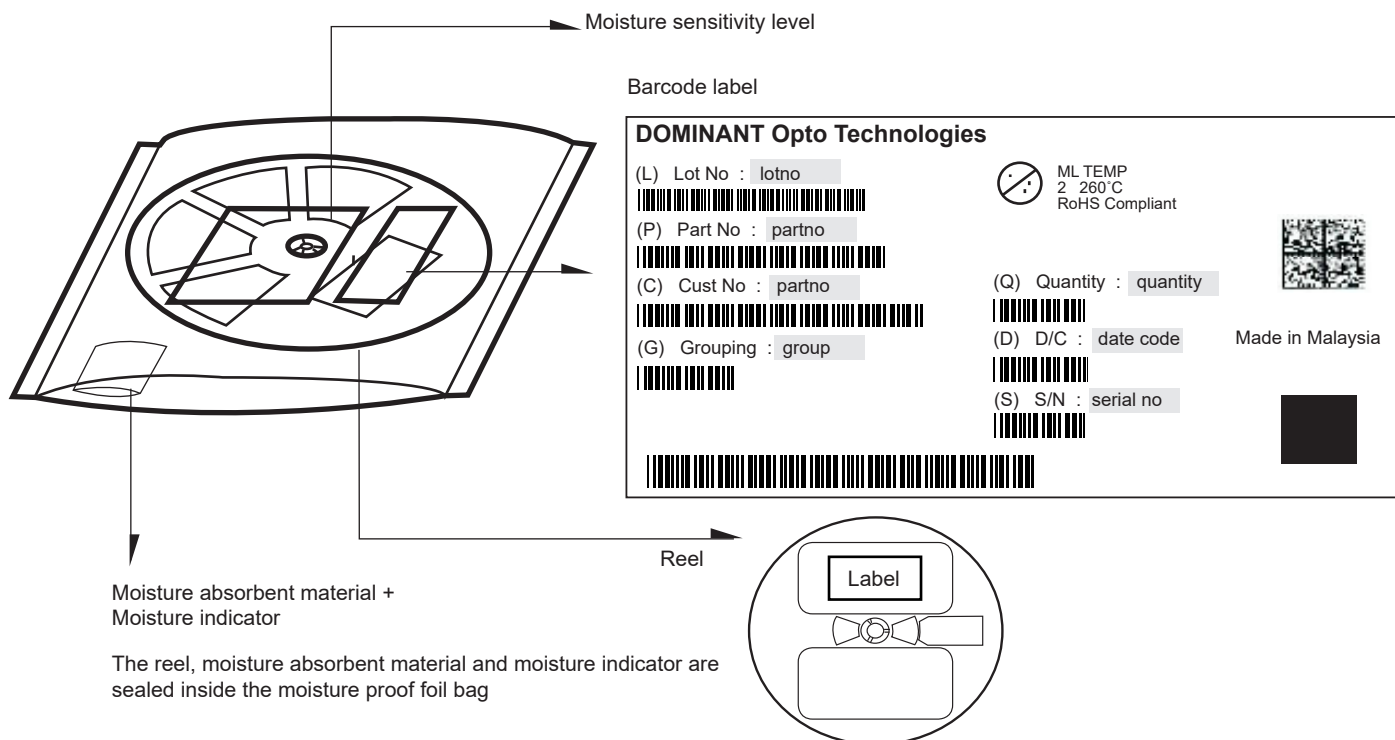

Quantity per bag (pcs)	Average 1pc SpiceLED (g)	1 completed bag (g)
5000	0.001	170 ± 10
18000	0.001	470 ± 10

Recommended Pb-free Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

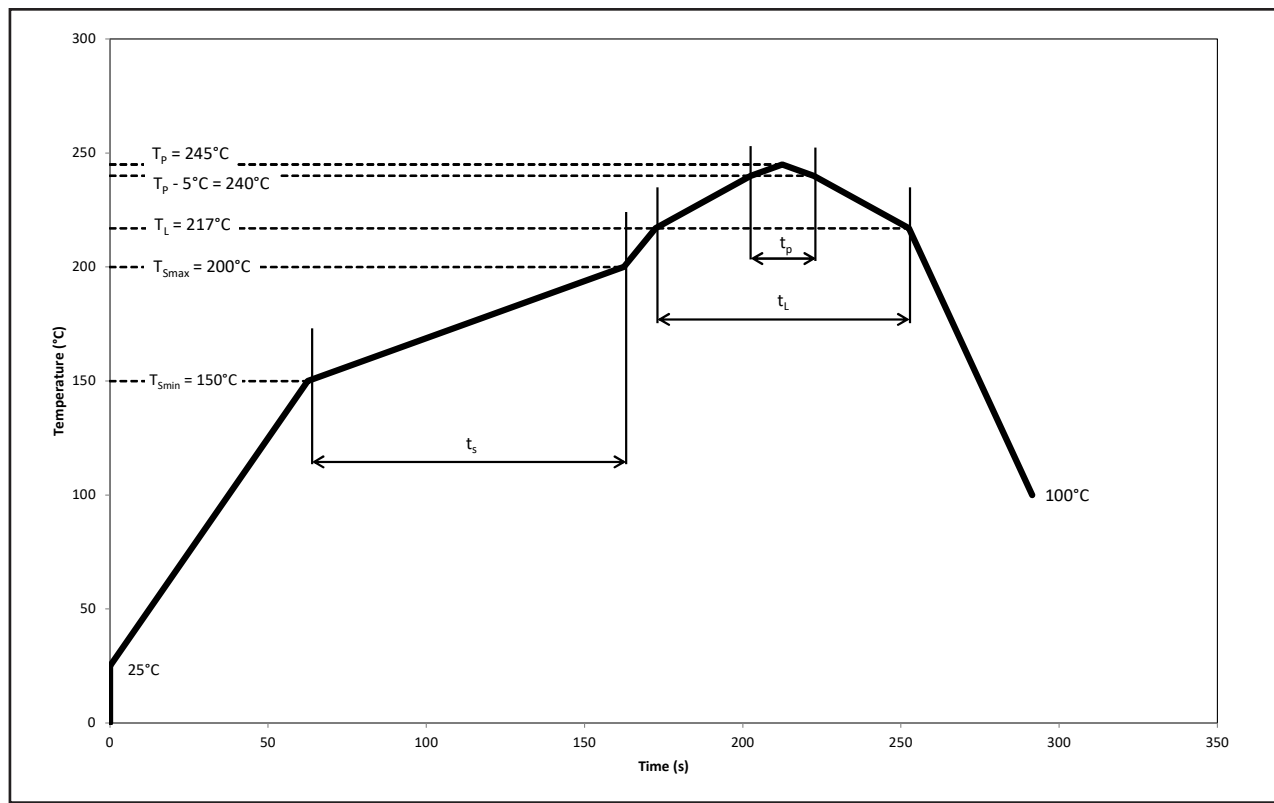

Profile Feature	Symbol	Min.	Pb-Free Assembly		Unit
			Recommended	Max.	
Ramp-up rate to preheat 25°C to T _{smin}	-	-	2	3	°C/s
Time t _s T _{smin} to T _{smax}	t _s	60	100	120	s
Ramp-up rate to peak T _L to T _p	-	-	2	3	°C/s
Liquidous temperature	T _L	-	217	-	°C
Time above liquidous temperature	t _L	60	80	150	s
Peak temperature	T _p	-	245	260	°C
Time within 5°C of the specified peak temperature T _p - 5°C	t _p	10	20	30	s
Ramp-down rate T _p to 100°C	-	-	3	6	°C/s
Time 25°C to T _p	-	-	-	480	s

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured when a current pulse of 8 ms(typ) with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Typical Values:**

- 4.1 At special conditions of LED manufacturing processes, typical data or calculated correlations of technical parameters only reflect the statistical figures. But not necessarily correspond to the actual parameters of each single product, which could differ from the typical data or calculated correlations or the typical characteristic line. These typical data may change whenever technical improvements happen.

5) **Tolerance of Measure**

- 5.1 Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimension are specific in mm.

6) **Reverse Voltage:**

- 6.1 Not designed for reverse operation. Continuous reverse voltage can cause migration and LED damage.

Revision History

Page	Subjects	Date of Modification
4	Add Characteristics	10 Dec 2013
7, 10	Update graph: Relative Intensity Vs Forward Current Update Carrier Tape	14 Feb 2014
7	Add Graph: Allowable Forward Current Vs Duty Ratio	02 Apr 2015
1, 12	Add Features Update Package Specification	26 Oct 2015
1, 10, 14	Add Features Error on Taping and Orientation Add Appendix	26 Oct 2016
1, 2, 6, 7, 11,12,13,15	Update Features Update Peak Pulse Current, Update Operating and Storage Temperature Update Packaging Specification Update Appendix	20 Nov 2019
11, 12, 13	Update Quantity per Reel (180mm) Update Recommended Pb-free Soldering Profile	21 Feb 2023
8, 12	Update Polarity in Package Outline Update Packaging Specification	31 Jan 2024

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

Dispose of product is in accordance with local, regional, national and international regulations.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, an IATF 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd.
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia
Tel: (606) 283 3566 Fax: (606) 283 0566
E-mail: sales@dominant-semi.com