


Features

- Ultra High Efficiency (Up to 93.5%)
- Ultra High Input Voltage (249~528Vac)
- Constant Voltage Output
- Input Surge Protection: 6kV line-line, 10kV line-earth
- All-Around Protection: OCP, OVP, SCP, OTP
- Waterproof (IP67)
- SELV Output
- Suitable for Independent Use
- 5 Years Warranty

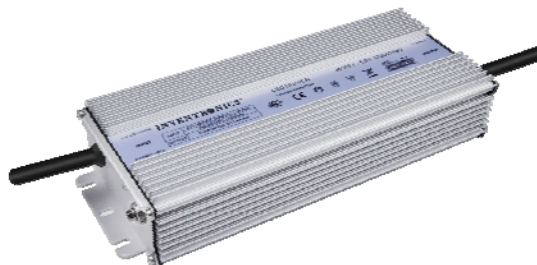

Description

The *ESV-320SxxxSV* series is a 320W, constant-voltage IP67 LED driver that operates from 249~528 Vac input with excellent power factor. It is created for many lighting applications including horticulture lighting, architectural, and decorative. The high efficiency of these drivers enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, over current, output over voltage, short circuit, and over temperature.

Models

Output Voltage	Input Voltage Range(1)	Output Current Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number (3)
					277Vac	480Vac	
24 Vdc	249~528Vac 352~500Vdc	0 ~ 13.4 A	320 W	92.5%	0.95	0.90	ESV-320S024SV
36 Vdc	249~528Vac 352~500Vdc	0 ~ 8.9 A	320 W	92.5%	0.95	0.90	ESV-320S036SV
48 Vdc	249~528Vac 352~500Vdc	0 ~ 6.7 A	320 W	93.0%	0.95	0.90	ESV-320S048SV
54 Vdc	249~528Vac 352~500Vdc	0 ~ 6.0 A	320 W	93.5%	0.95	0.90	ESV-320S054SV

Notes: (1) Certified voltage range: 277-480Vac or 352-500Vdc

(2) Measured at 25°C, 100% load and 480 Vac input.

(3) SELV output

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	249 Vac	-	528 Vac	352~500Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.7 mA	IEC60598-1; 480Vac/60Hz
Input AC Current	-	-	1.4 A	Measured at 100% load and 277 Vac input.
	-	-	0.81 A	Measured at 100% load and 480 Vac input.

Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Inrush Current(I ² t)	-	-	8.93 A ² s	At 480Vac input, 25°C cold start, Duration=616μs, 10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 277-480Vac, 50-60Hz, 60%-100%load (192-320W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Voltage Tolerance	-2.5%	-	2.5%	
Output Voltage Ripple (pk-pk)	-	-	2%Vo	At 0% - 100% load condition. Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 μF ceramic capacitor and a 10μF electrolytic capacitor.
Output Voltage Overshoot / Undershoot	-	-	5%Vo	
Line Regulation	-	-	±0.5%	Measured at 100% load
Load Regulation	-	-	±1.0%	
Turn-on Delay Time	-	-	0.5 s	Measured at 277Vac input, 60%-100%load
	-	-	0.5 s	Measured at 480Vac input, 60%-100%load
Load Dynamic Response	Output Deviation	-	5%Vo	R/S: 1 A/us Load: 10% ~ 100%load.
	Settling Time	-	10 ms	
Temperature Coefficient	-	0.03%/°C	-	Case temperature = 0°C ~Tc max

Note: All specifications are typical at 25 °C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277Vac input: ESV-320S024ST ESV-320S036ST ESV-320S048ST ESV-320S054ST	89.0% 89.5% 90.0% 90.0%	91.0% 91.5% 92.0% 92.0%	- - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 347Vac input: ESV-320S024ST ESV-320S036ST ESV-320S048ST ESV-320S054ST	90.0% 90.0% 90.5% 91.0%	92.0% 92.0% 92.5% 93.0%	- - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 480Vac input: ESV-320S024ST ESV-320S036ST ESV-320S048ST ESV-320S054ST	90.5% 90.5% 91.0% 91.5%	92.5% 92.5% 93.0% 93.5%	- - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
MTBF	-	230,000 Hours	-	Measured at 480Vac input, 80%load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	93,000 Hours	-	Measured at 480Vac input, 80%load and 70°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	+70°C	Case temperature for 5 years warranty. Humidity: 10% RH to 100% RH.
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	8.82 × 3.86 × 1.76 224 × 98 × 44.8			With mounting ear 9.88 × 3.86 × 1.76 251 × 98 × 44.8
Net Weight	-	1815 g	-	


Note: All specifications are typical at 25 °C unless otherwise stated.

Safety & EMC Compliance


Safety Category	Standard
CE & ENEC	EN61347-1, EN61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
EMI Standards	Notes
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 6 kV, line to earth 10 kV ⁽²⁾
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

- Notes:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.
- (2) To perform electric strength (hi-pot) testing, the "GDT ground disconnect" (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.





Lifetime vs. Case Temperature Curve

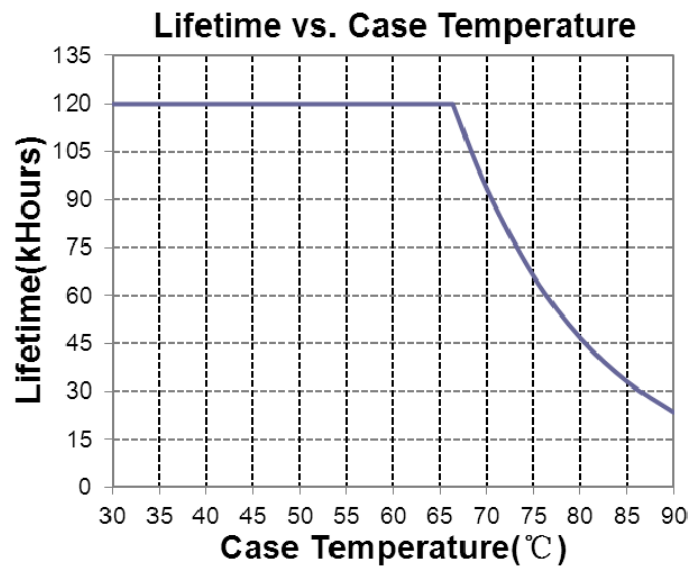


Inrush Current Waveform

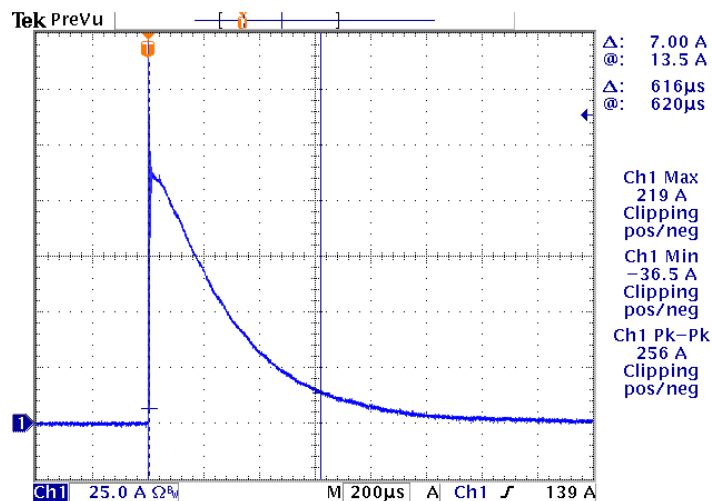


Efficiency vs. Load

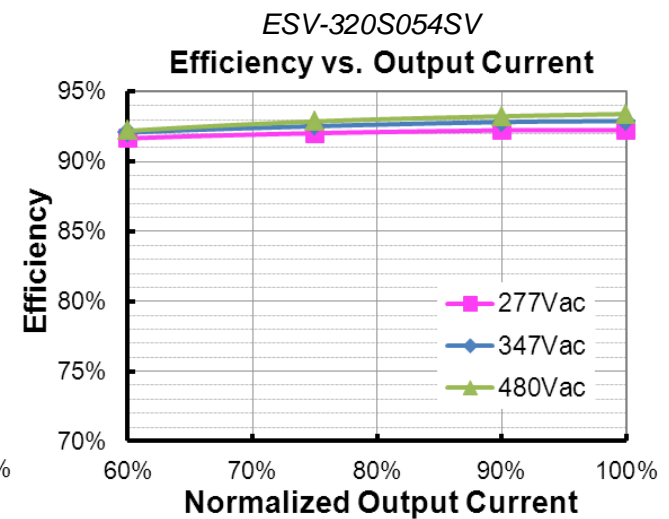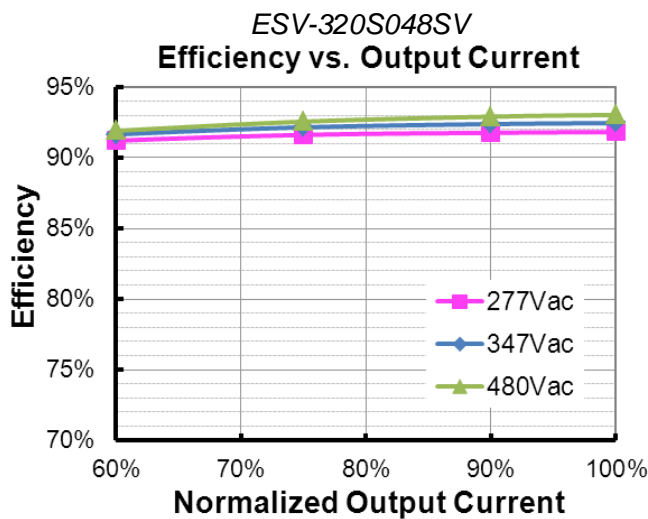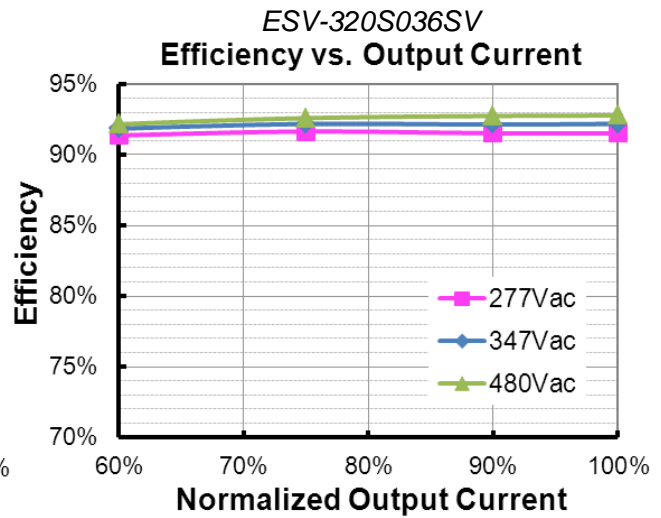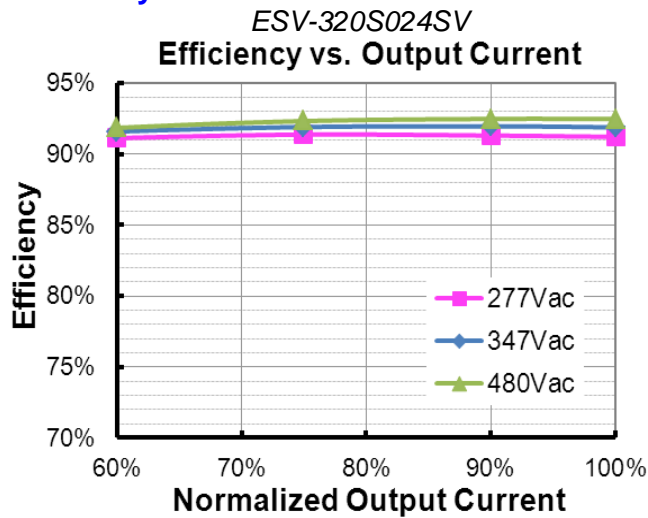

Power Factor Characteristics

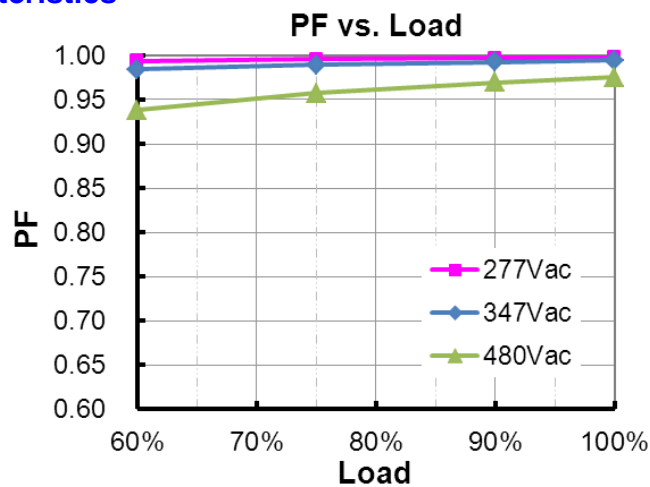


Total Harmonic Distortion

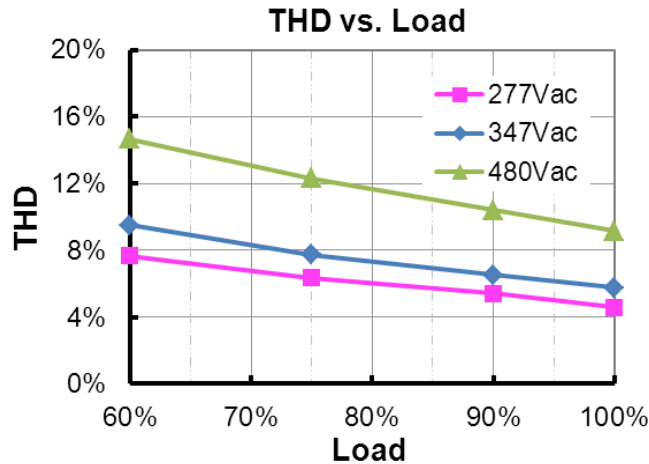

Protection Functions

Parameter	Notes
Over Current Protection	Auto Recovery. The driver shall be self-recovery when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Temperature Protection	Auto Recovery. Returning to normal after over temperature is removed.

Mechanical Outline

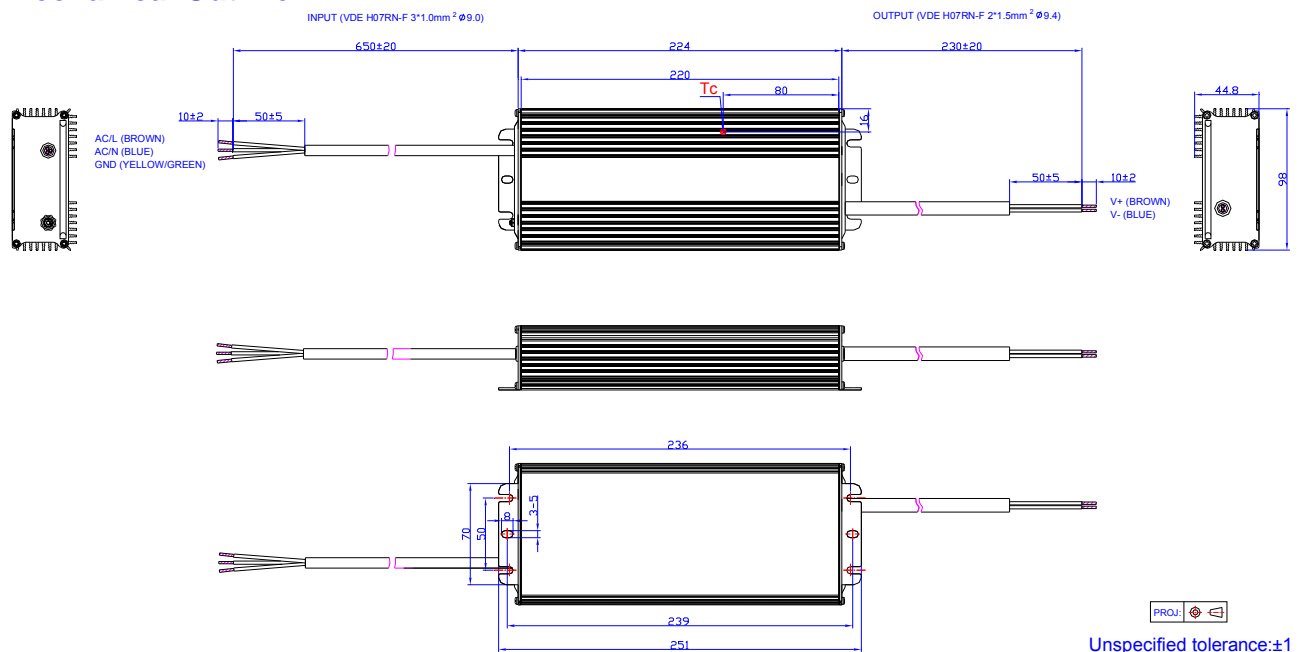

RoHS Compliance

Our products comply with the European Directive 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2018-11-30	A	Datasheet Release	/	/