

## 1. Description

LF-GDE014YG series is a 14W constant current LED driver. It has Triac dimming function. It's compatible with main trailing-edge dimmers in the market. Its output current is adjustable via the DIP switch from 200mA to 350mA, in steps of 50mA. It has flicker free effect during the whole process of dimming, which provides comfortable lighting for users.

## 2. Features

- Constant current output. The output current can be adjusted via the DIP switch.
- Plastic casing
- Suitable for Class II light fixtures
- Triac dimming
- Flicker free during the whole process of dimming
- Warranty: 5 years (Please refer to the warranty condition.)
- Certifications: TUV, CE, RCM, ENEC, CCC

## 3. Applications

- LED Down light
- LED Ceiling light

## 4. Electrical Characteristics

Model		LF-GDE014YG			
Output	Output Voltage	25-40V (Within 33-40V, the dimming effect is the best.)			
	Output Current	The output current can be adjusted via the DIP switch. Please refer to the DIP switch table.			
		200mA	250mA	300mA	350mA
	Ripple Voltage	<1V @20MHz			
	Current Accuracy	±6% @230Vac			
	Temperature Drift	±10%			
	Line Regulation	±6%			
	Start-up Time	230Vac <0.5S			
Input	Line Regulation	±6%			
	Input Voltage	220-240Vac (voltage limit : 198-264Vac)			
	Input Frequency	47-53Hz			
	Input Current	0.12A Max			
	Power Factor	≥0.90@230Vac (LED load)			
	THD	≤20%			
	Efficiency	≥79%@230Vac			
	Inrush Current	≤30A/350uS@230Vac (Max)			
	Leakage Current	≤0.7mA			
Protective Features	Open Circuit Protection	≤70V (Reconnecting the AC power supply is needed.)			
	Short Circuit Protection	Hiccup mode (Reconnecting the AC power supply is needed.)			
Environment Conditions	Working Temperature	-30℃ ~ +50℃			
	Working Humidity	20-90%RH (no condensation)			
	Storage Temperature/Humidity	-40℃ ~ 80℃(six months under class I environment); 10-90%RH (no condensation)			
	Atmospheric Pressure	86-106KPa			
Safety & Norms	Certifications	TUV, CE, RCM, ENEC, CCC			
	Withstanding Voltage	I/P-O/P: 3.75KV, 5mA, 60s			
	Insulation Resistance	I/P-O/P: 500Vdc, >100MΩ			
	Surge Rating	IEC61000-4-5 (L-N: 1KV )			
	Safety Standard	EN61347, GB19510			
	EMI	EN55015, EN61000-3-2			
	EMS	EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547			


Others	IP Rating	IP20
	Warranty Condition	5 years ( $T_c \leq 77^\circ\text{C}$ )
Testing Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, Oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectrum analyzer: KH3935, hi-pot tester: TH9201B, light flicker analyzer: LFA-3000, etc.	
Testing Conditions	Unless otherwise stated, the parameters of the power factor and efficiency are the test results under the ambient temperature of $25^\circ\text{C}$ and humidity of 50%, AC input of 230V and 90% load. The tests above were without connecting any dimmer.	
Remarks	<p>1. It is recommended that customers should install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity.</p> <p>2. The PC cover, casing, end caps and other parts of the LED driver inside the LED light fixture must conform to UL94-V0 flammability standard or above.</p> <p>3. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer should re-confirm the EMC of the whole LED light fixture.</p>	

## 5. Circuit Breaker & Relevant Parameters

Name	Value	Remark
Surge peak current ( $I_{\text{peak}}$ )	4 A	Input voltage 230Vac
Surge half-peak time ( $T_{\text{width}}$ )	65 us	Input voltage 230Vac, measure the time for $I_{\text{peak}}$ to drop to the half value.
Quantity of the same model driver that a type-B 16A circuit breaker can configure.	106 pcs	

This table shows the reference data of other types of circuit breakers.


type	rank	relative driver quantities
B	10A	66 pcs
	13A	85 pcs
	16A	106 pcs
	20A	132 pcs
	25A	165 pcs
C	10A	110 pcs
	13A	143 pcs
	16A	180 pcs
	20A	220 pcs
	25A	275 pcs

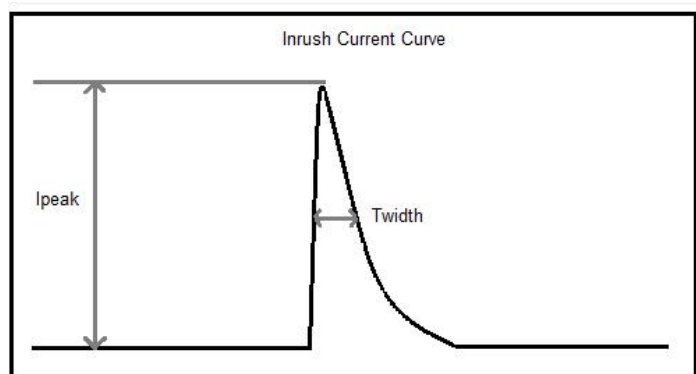


## 6. DIP Switch Table

DIP switch table				
Ta	Vo DC	Current	1	2
50℃	25-40V	350mA	ON	ON
		300mA	—	ON
		250mA	ON	—
		200mA	—	—

## 7. Dimensions (unit: mm; tolerance: +0.5mm )

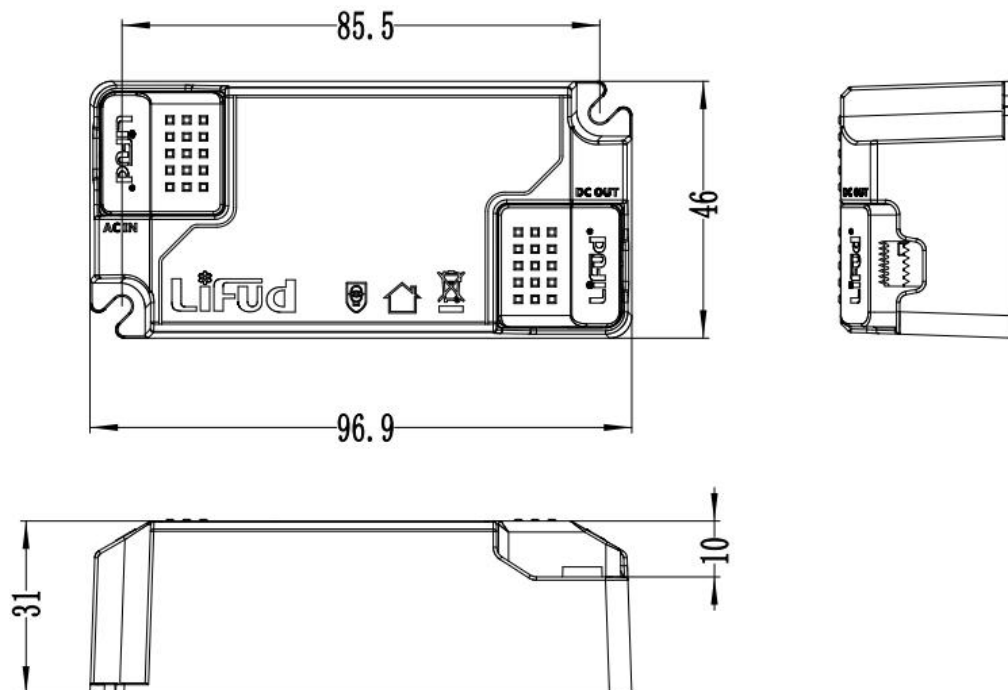


## 8. TC Point (on the top of LED driver's casing)

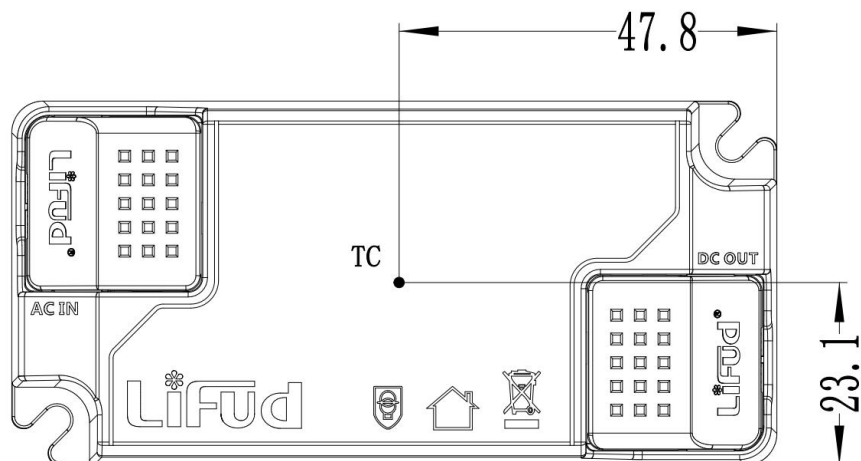

## 9. Packaging Specifications


LF-GDE014YG	
packaging dimensions	385*285*210mm (L*W*H)
quantities	15 pcs/layer; 90 pcs/ctn
weights	0.075 kg±5%/pc; 7.34 kg±5%/ctn

## 10. Product Feature Curves

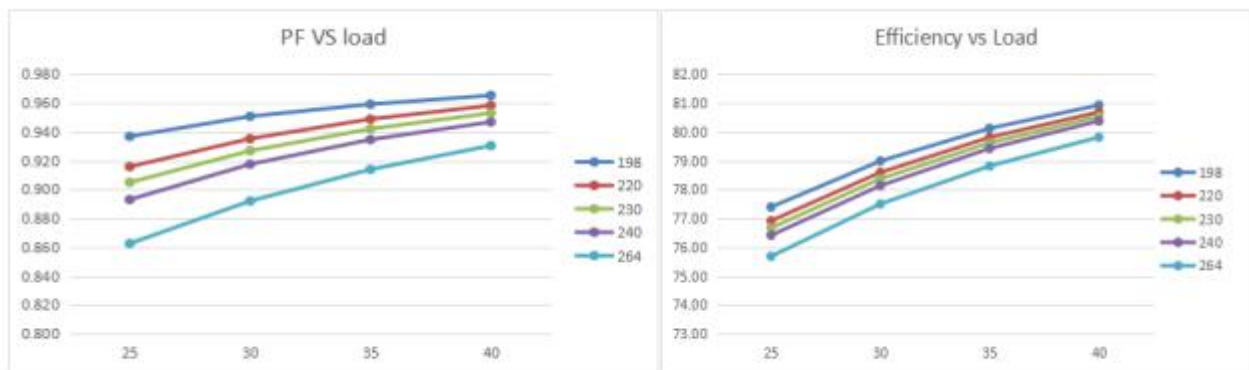


## 11. Lifetime Curve

The lifetime of the LED driver is calculated in a confined space when the casing temperature reaches 40°C, 50°C, 60°C, 70°C and 80°C.

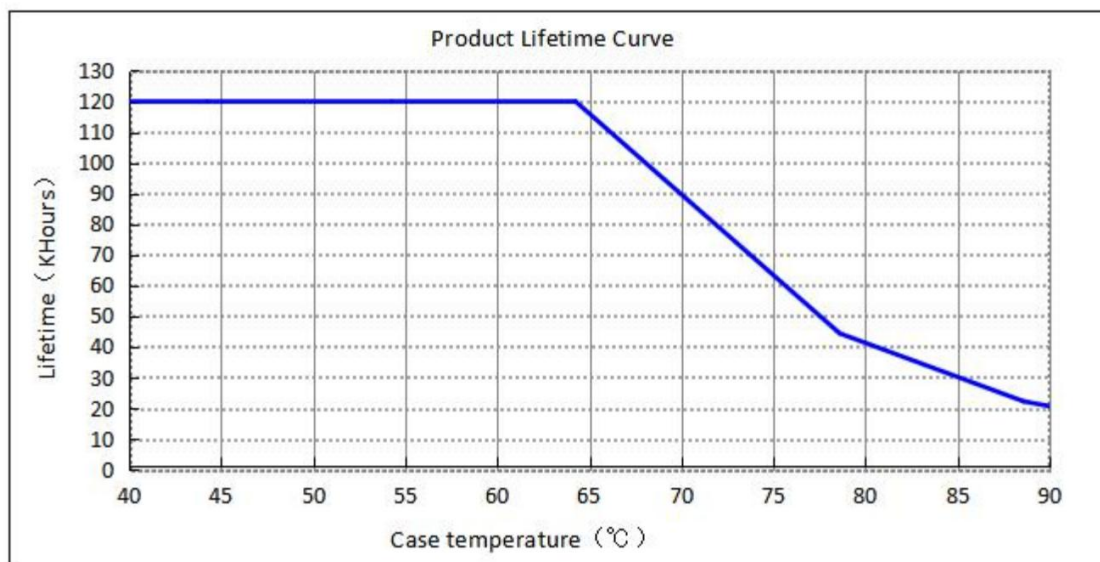

## 12. Dimming Curves

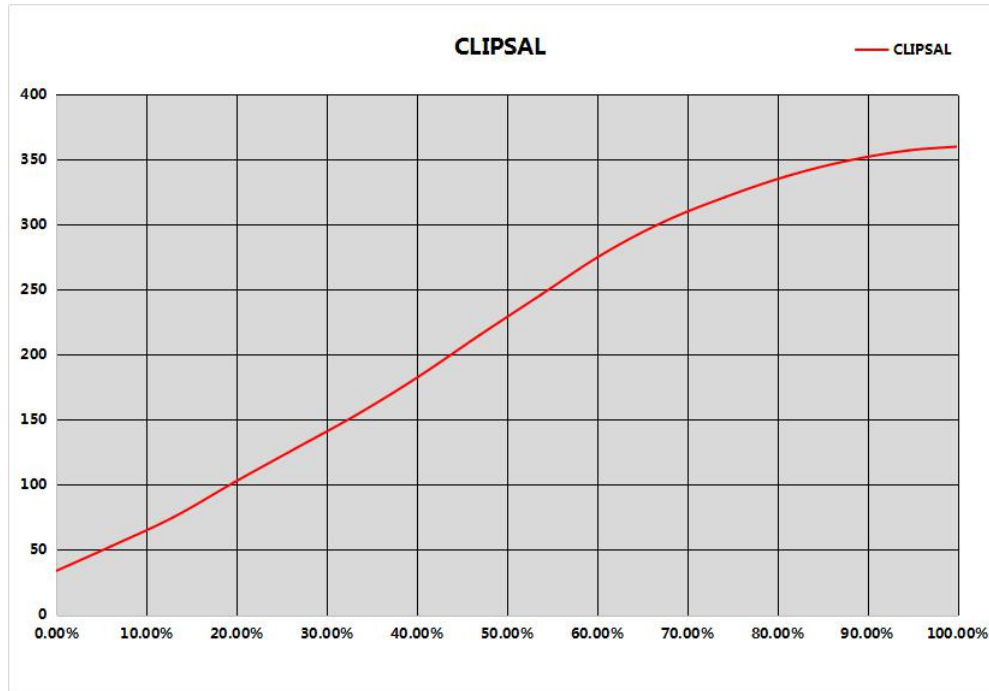

1. Verified by Lifud team, this driver is compatible with these dimmers:

·CLIPSAL: 32E450UDM

·DIGINET: MEDM


When the dimmer is started up, there will be output current overshooting. The overshooting amplitude is shown as follows. (Please choose proper LED beads according to their specifications. Feel free to contact Lifud team for technical support.)

Output Voltage	Output Current			
	200mA	250mA	300mA	350mA
25-33V start-up overshooting amplitude	≤30%	≤30%	≤30%	≤30%
33-40V start-up overshooting amplitude	≤10%	≤10%	≤10%	≤10%

2. If the end users do not use the dimmers mentioned above, it's necessary to test if the end users' dimmers are compatible with this driver. They can conduct the test by themselves or they can send the dimmers to Lifud team and we will conduct the tests for them.

3. The signature on this specification indicates that the customers have confirmed that this LIFUD driver is compatible with their dimmers. And thus Lifud will not be responsible for any quality complaint caused by incompatible dimmers.

### 13. Wiring diagram

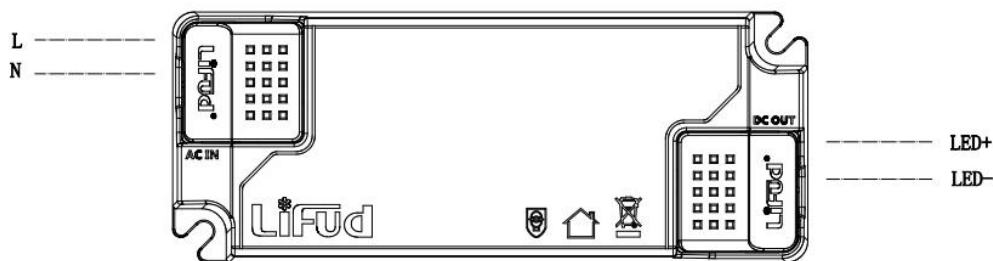

### 14. Label


**TRIAC Constant Current Dimming Driver**  
**Model: LF-GDE014YG LED Driver (LED控制装置)**  
**Input: 220-240V ~ 50/60Hz Max. 0.12A**  
**Output Voltage: 25-40V --- P rated: 14W (Max)**  
**U out: 70V PF: ≥ 0.9C ta: 50°C tc: 90°C**  
**For Australia and New Zealand, the marking label with**  
**For LED modules only**  
**www.lifud.com**  
**•tc**  
**Made in China (中国制造)**

**Input**  
**AC-L**  
**AC-N**  
0.75-1.5□

**Output**  

I rated (CC)	1	2
350mA	on	on
300mA	-	on
250mA	on	-
200mA	-	-

**LED+**  
**LED-**  
0.5-1.0□

**Preparation for input and output**  
7.5mm  


**Logos:** EN 25, TÜV SÜD, CE, E, SELV, and a triangle symbol.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.