


Dimensions

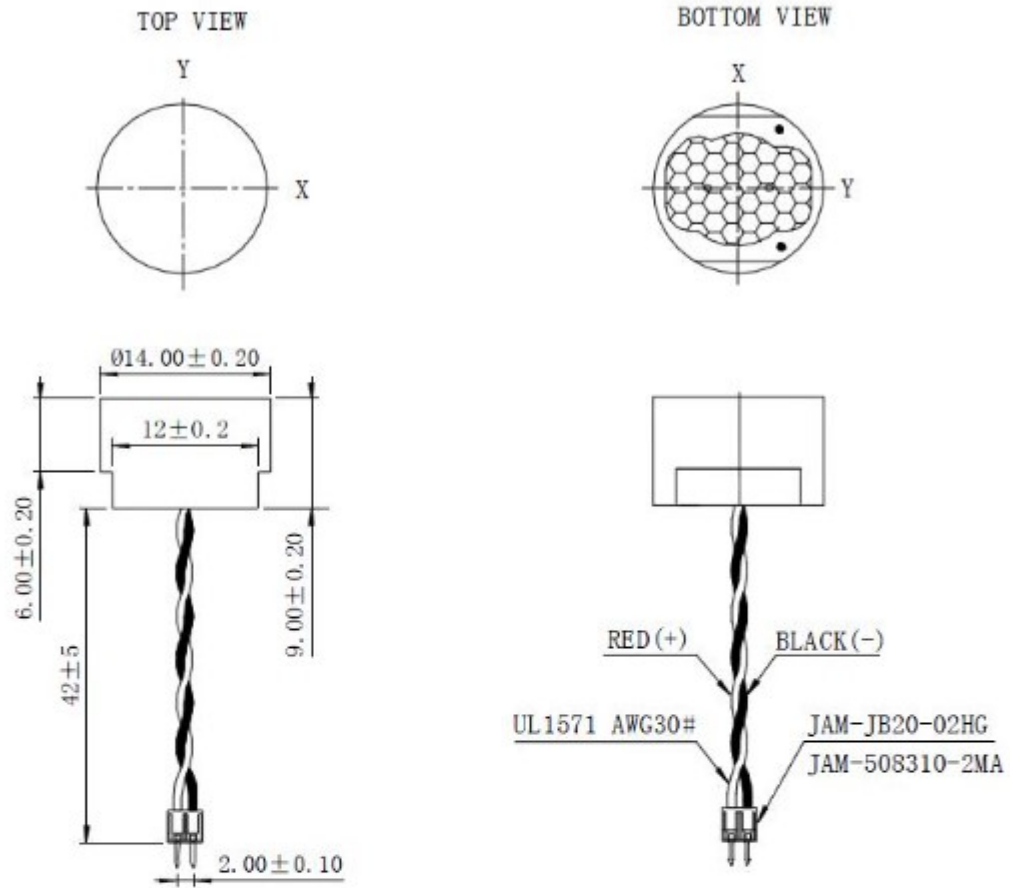

Specifications

Item	Specification
Resonant frequency	$48 \pm 1.0 \text{ KHz}$
Sensitivity	$3.0 \pm 1.0 \text{ Vp-p}$
Decay time	$\leq 1.80 \text{ ms}$
Directivity(deg) X-axis	$100 \pm 15^\circ$
Directivity(deg) Y-axis	$50 \pm 10^\circ$
Capacitance	$1800 \pm 15\% \text{ pF}$
Max.Input Volt	140 Vp-p
Mean time to failure	50000 hs
Operating temperature	$-40^\circ \text{C} \sim +85^\circ \text{C}$