


Dimensions

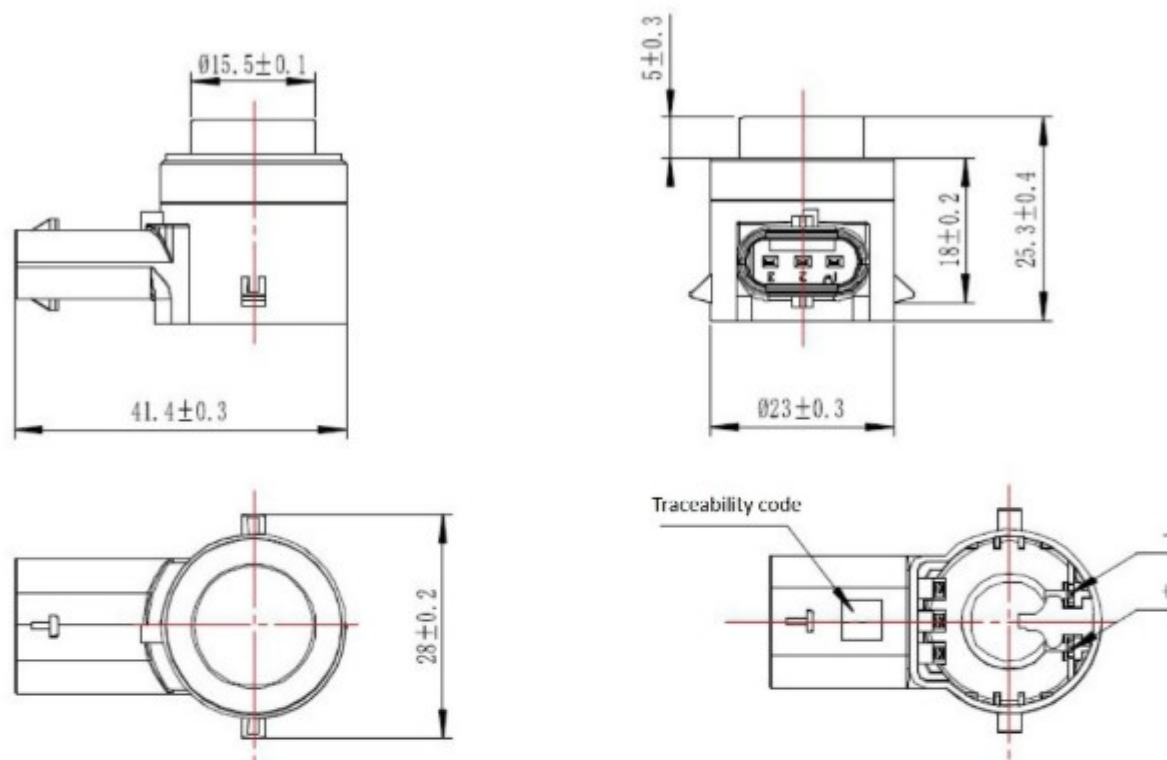

Specifications

Item	Specifications
Resonant frequency	55.5 ± 1.0 kHz
Ring time	1.0~1.45 mS
Echo sensitivity	28~64 LSB
Directivity(deg) X-axis	$90^\circ \pm 10^\circ$
Directivity(deg) Y-axis	$45^\circ \pm 10^\circ$
Capacitance	$1300 \pm 20\%$ pF
Max. input voltage	140Vp-p
Operating temperature	$-40 \sim +85^\circ\text{C}$