


### Technical Data Sheet Infrared MIDLED LED IR91-01C/L491/2R

#### Features

- Low forward voltage.
- View angle 40° (Typ.)
- Pb free
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).



#### Description

IR91-01C/L491/2R is an infrared emitting diode with miniature MIDLED package. The device is spectrally matched with silicon photodiode and phototransistor.


#### Applications

- Infrared applied system

#### Device Selection Guide

Device No.	Chip Material	Lens Color
IR91-01C/L491/2R	GaAlAs	Water Clear

## Package Dimensions

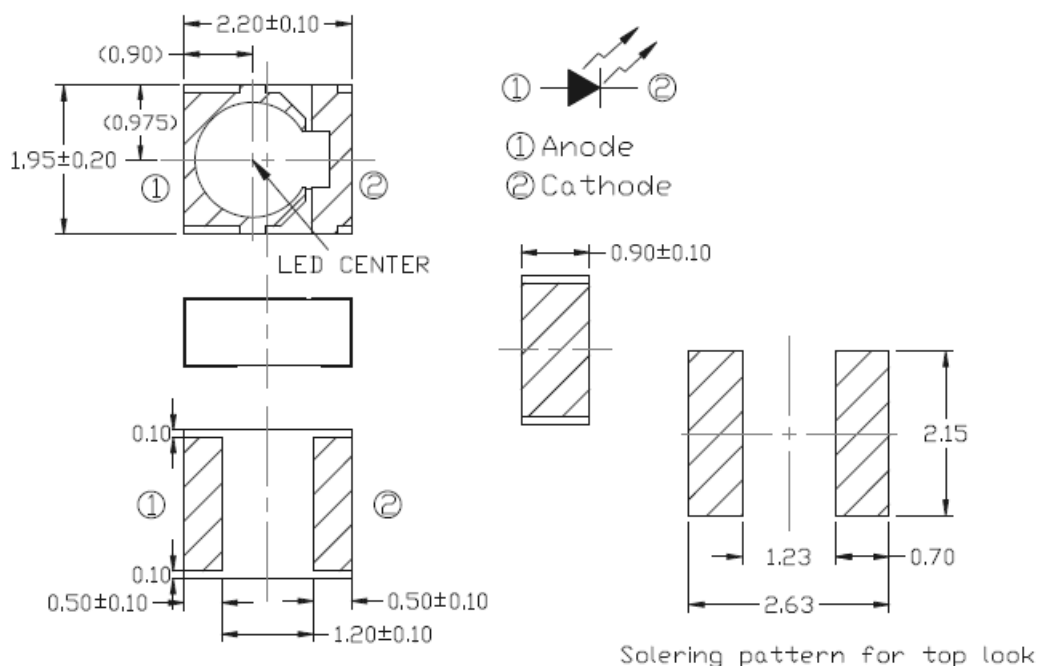

- Notes:** 1.All dimensions are in millimeters  
2.Tolerances unless dimensions  $\pm 0.1\text{mm}$

## Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Rating	Unit
Continuous Forward Current	$I_F$	70	mA
Peak Forward Current *1	$I_{FP}$	700	mA
Reverse Voltage	$V_R$	5	V
Operating Temperature	$T_{opr}$	-40 ~ +85	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100	$^\circ\text{C}$
Soldering Temperature *2	$T_{sol}$	260	$^\circ\text{C}$
Power Dissipation at(or below) 25 $^\circ\text{C}$ Free Air Temperature	$P_c$	140	mW
ESD	HBM	Min.2000	V
	MM	Min.200	V
Junction Temperature	$T_j$	$\leq 115$	$^\circ\text{C}$

**Notes:** \*1:  $I_{FP}$  Conditions--Pulse Width $\leq 100\mu\text{s}$  and Duty $\leq 1\%$ .


\*2: Soldering time $\leq 5$  seconds.

**Electro-Optical Characteristics (Ta=25°C unless specified otherwise)**


Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Radiant Intensity	$I_E$	55.0	65.0	80.0	mW/sr	$I_F=100\text{mA}$ Pulse Width $\leq 100\mu\text{S}$ Duty $\leq 1\%$
Peak Wavelength	$\lambda_p$	--	940	--	nm	$I_F=20\text{mA}$
Spectral Bandwidth	$\Delta\lambda$	--	30	--	nm	$I_F=20\text{mA}$
Forward Voltage	$V_F$	0.75	--	--	V	$I_F=10\mu\text{A}$
		1.10	1.40	1.70	V	$I_F=20\text{mA}$
		1.30	1.60	2.00	V	$I_F=100\text{mA}$ Pulse Width $\leq 100\mu\text{S}$ Duty $\leq 1\%$
Reverse Current	$I_R$	--	--	10	$\mu\text{A}$	$V_R=5\text{V}$
View Angle	$2\theta_{1/2}$	--	40	--	Deg.	$I_F=20\text{mA}$

**Notes: Radiant Intensity tolerance is  $\pm 10\%$**

Typical Electro-Optical Characteristics Curves

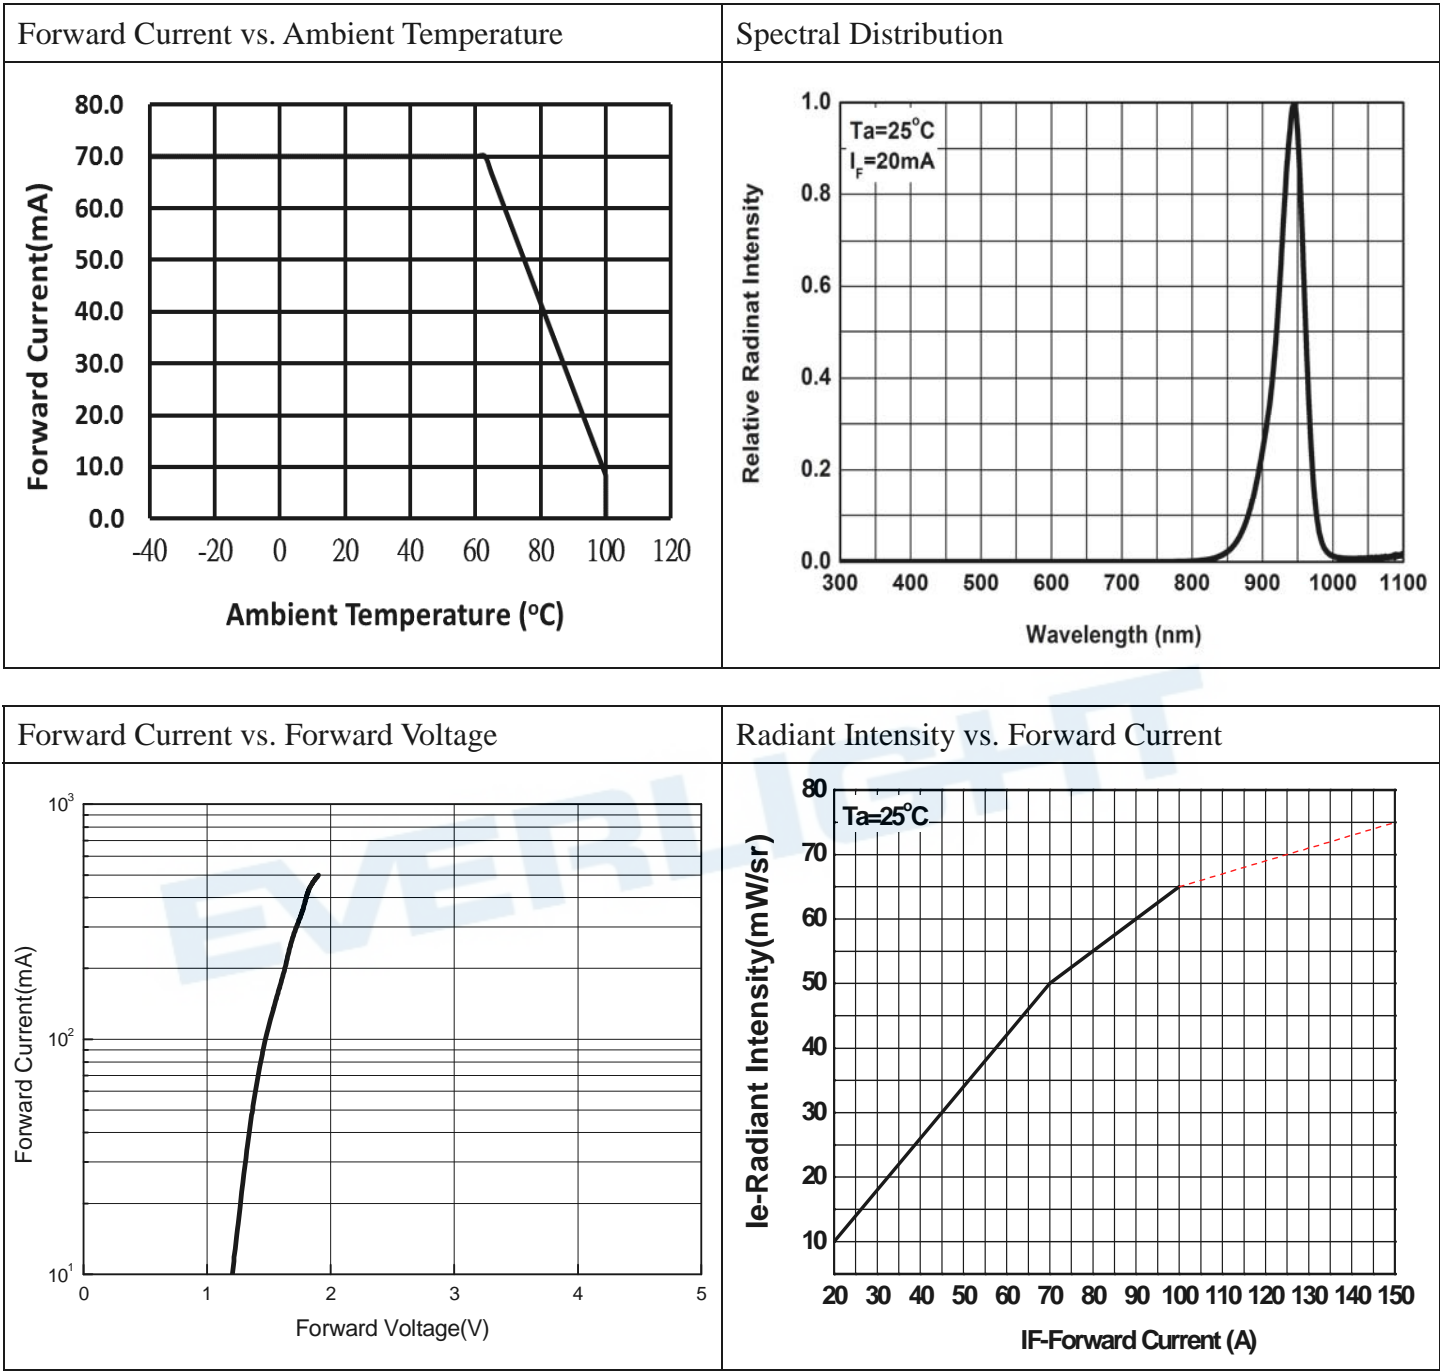

Relative Radiant Intensity vs. Angular Displacement

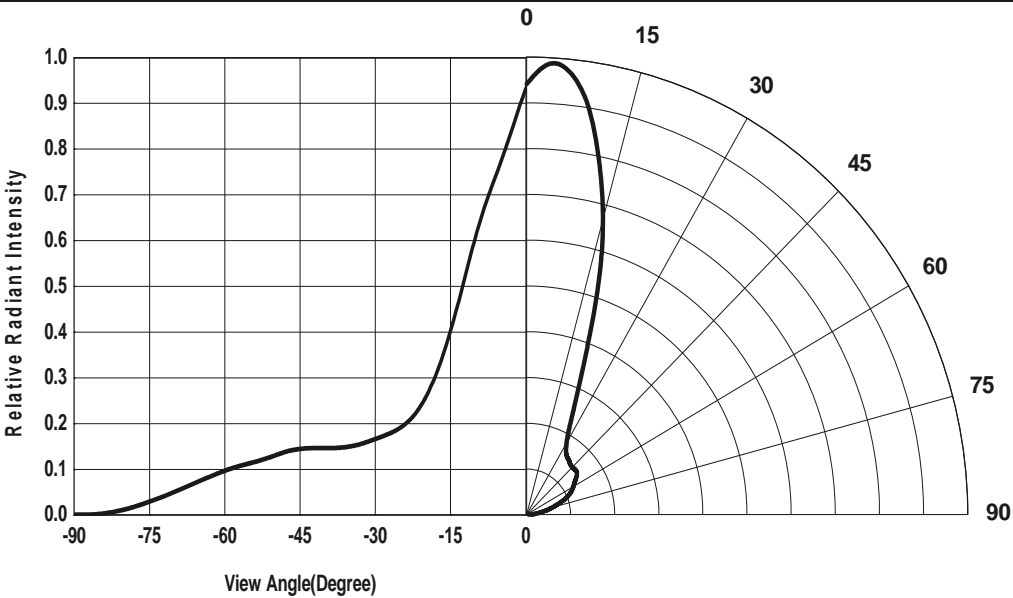

EVERLIGHT

## Precautions For Use

### 1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change  
( Burn out will happen ).

### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) (MSL-3) after opening the package
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.  
Baking treatment : 60±5°C for Min. Min. 24 hours.

### 3. Soldering Condition

#### 3.1 Pb-free solder temperature profile

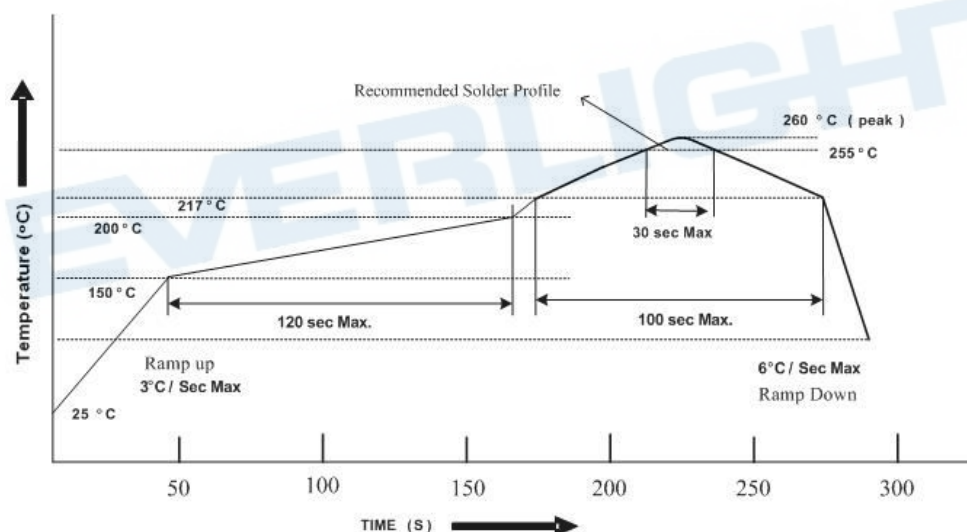

- 3.2 Reflow soldering should not be done more than three times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Technical drawing of a circular mechanical part, likely a flange or cover plate, showing dimensions in millimeters (mm).


The drawing includes the following dimensions:

- Overall diameter:  $\phi 178.0 \pm 1.0$
- Inner circular feature diameter:  $\phi 60.0 \pm 0.5$
- Distance from center to the inner feature:  $2.2 \pm 0.5$
- Distance from center to the outer edge of the inner feature:  $\phi 13.0 \pm 0.5$
- Distance from the center of the inner feature to the outer edge of the main body:  $9.0 \pm 0.5$
- Distance from the center of the inner feature to the outer edge of the main body (including the inner feature):  $12.0 \pm 0.15$

## 2. Carrier Tape Dimensions:(Quantity: 2000pcs/reel)



## Packing Procedure

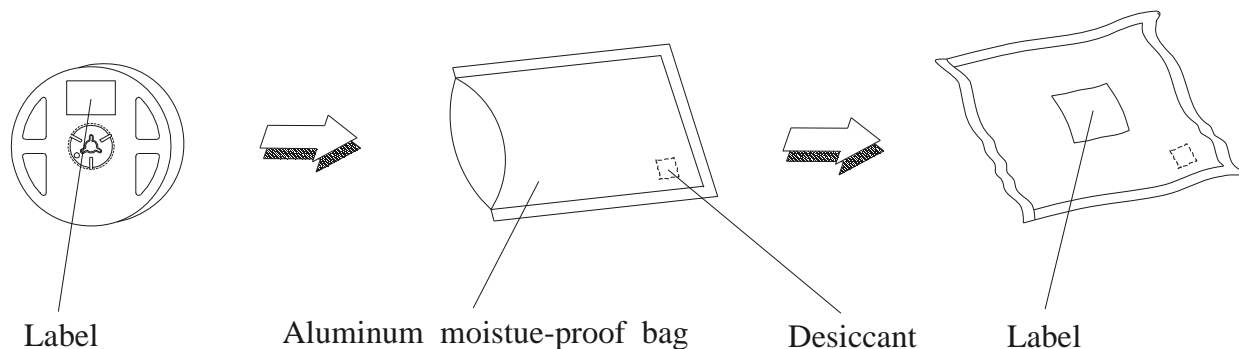

## Label Form Specification

RoHS		<b>EVERLIGHT</b>	
CPN:			
XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX			
P/N:			
XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX			
LOT NO:			
XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX			
QTY:	HUE:		
CAT:	REF:		
REFERENCE:			

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

## DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.